

MODEL	BF-M712
Standby Power (50Hz)	625KW / 781KVA
Prime Power (50Hz)	576KW / 720KVA

### Standard Features

#### General Features:

- Engine (MTU 12V2000G63)
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Absorber
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Permanent Magnet Generator (PMG)
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, muffler
- User manual



PHOTO FOR REFERENCE ONLY

### Generator Ratings

Voltage	HZ	Phase	P.F ( $\cos \phi$ )	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
440/254	50	3	0.8	1025	625/781	576/720
415/240	50	3	0.8	1087	625/781	576/720
400/230	50	3	0.8	1128	625/781	576/720
380/220	50	3	0.8	1187	625/781	576/720

**Prime Power (PRP):** Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

**Standby Power Rating (ESP):** The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

### Sales Promises

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: a, 15 months, counted on the day BAIFA sold to the first buyer; b, One year after installation; c, 1000 running hours (accumulated); subject to the earlier one.

Service and parts are available from Baifa Power or distributors in your location.

### ENGINE DATA

Manufacturer / Model:	MTU/12V2000G63
Air Intake System:	Turbo, Air/Air DC
Fuel System:	Electronic Fuel Injection System
Cylinder Arrangement:	12 in "V"
Displacement:	23.88L
Bore and Stroke:	130*150 (mm)
Compression Ratio:	16.0
Rated RPM:	1500rpm
Max. Standby Power at Rated RPM:	680KW (without fan)
Governor Type:	MDEC

#### Exhaust System

Exhaust Gas Flow:	145.2m <sup>3</sup> /min
Exhaust Temperature:	555°C
Max Back Pressure:	5kPa

#### Air Intake System

Max Intake Restriction:	3kPa
Burning Capacity:	52.8m <sup>3</sup> /min
Intake Flow:	756m <sup>3</sup> /min

#### Fuel System

100%(Prime Power) Load:	196 g/Kwh
75%(Prime Power) Load:	196 g/Kwh
50%(Prime Power) Load:	203 g/Kwh
Total Fuel Flow:	450L/h

#### Oil System

Total Oil Capacity:	82L
Oil Consumption:	0.5% Fuel Consumption
Engine Oil Tank Capacity:	67L
Oil Pressure at Rated RPM:	620-750kPa

#### Cooling System

Total Coolant Capacity:	174L
Max Water Temperature:	102°C

### ALTERNATOR SPECIFICATION

#### GENERAL DATA

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

#### Alternator Data

Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Power Factor:	0.8
Protection Grade:	IP23
Altitude:	≤1000m
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	<50
THF:	<2%
Voltage Regulation, Steady State:	±1%
Alternator Capacity:	725KVA
Alternator Efficiencies:	94.6%
Air Cooling Flow:	1m <sup>3</sup> /s


### GENERATING SET DATA

Voltage Regulation:	±5%
Voltage Regulation, Stead State:	±1%
Sudden Voltage Warp (100% Sudden Reduce):	+20%
Sudden Voltage Warp (Sudden Increase):	-15%
Voltage Stable Time (100% Sudden Reduce):	≤4S
Voltage Stable Time (Sudden Increase)	≤4S
Frequency Reduce:	≤5% adjustable
Frequency Regulation, Stead State:	≤0.5%
Frequency Waving:	≤0.5%
Sudden Frequency Warp (100% Sudden Reduce):	+10%
Sudden Frequency Warp (Sudden Increase):	-7%
Frequency Recovery Time (100% Sudden Reduce):	≤3S
Frequency Recovery Time (Sudden Increase):	≤3S
Noise Level:	112dB

### Options

Engine	Fuel System	Control System
<ul style="list-style-type: none"> <li>● Oil Drain Valve</li> </ul>	<ul style="list-style-type: none"> <li>● Daily Fuel Tank</li> <li>● Base Fuel Tank</li> <li>● Water Separator</li> <li>● Fuel Level Sensor</li> </ul>	<ul style="list-style-type: none"> <li>● Remote Control Panel</li> <li>● Auto Transfer Switch (ATS)</li> <li>● Paralleling System</li> <li>● Electricity Output Cabinet</li> </ul>
Alternator	Others	Data
<ul style="list-style-type: none"> <li>● Anti Condensation Heater</li> <li>● Drop CT (For Paralleling)</li> </ul>	<ul style="list-style-type: none"> <li>● Rainproof Type</li> <li>● Soundproof Type</li> <li>● Container Type</li> </ul>	<ul style="list-style-type: none"> <li>● Spare Parts</li> </ul>

### Dimension & Weight

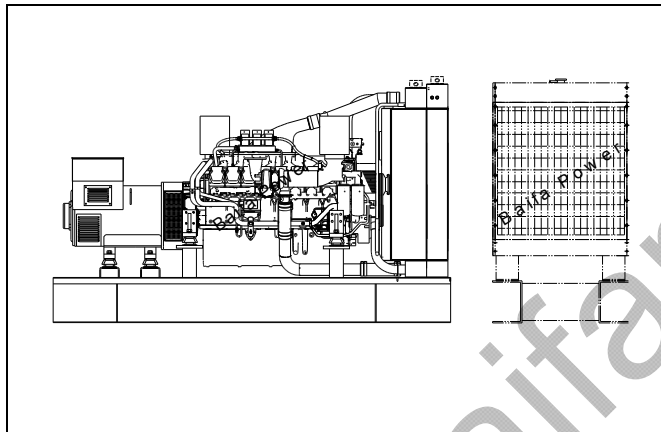


#### Standard Configuration (Open Type)

Overall Size: 4000 (mm) \*1750 (mm) \*2040 (mm)  
Weight: 6950kg

#### With Base Fuel Tank

Overall Size: 4000 (mm) \*1750 (mm) \*2050 (mm)  
Weight: 7000kg

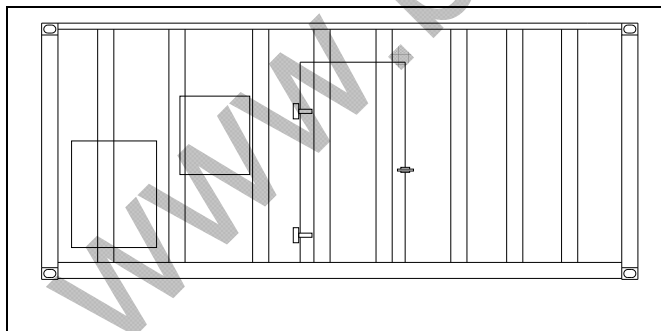

#### Soundproof Type

Overall Size: 20'ft container  
6058 (mm) \*2438 (mm) \*2591 (mm)  
Weight: 11000kg

### Auto Module Control Panel



**Auto Module Control Panel** is the configuration for nobody on duty controlling generators. This kind of panel adopts auto module control system, with large LCD display to show the menu.

Features: MRS10-can receive remote output signal from ATS and realize auto start and stop of generators.

MRS16-can realize all functions of MRS10, add RS232 interface which can communicate with PC to realize remote operation.

AMF25-Auto Mains Failure controller, can realize all functions of MRS16, furthermore can detect ATS and control directly.

### Auto Parallel Control Panel



**Automatic Parallel Control Panel** This new automatic parallel system adopts intelligent modules, inserted and folded installed, no need the peripheral relay and logic circuit. The main switch adopts electronic breaker or frame breaker, combined together with the generator, which is very reliable. One generator, one panel. The panel can be used both for singly and parallel. It is only need to parallel generator with such panel when the capability needs to be enlarged in the future.