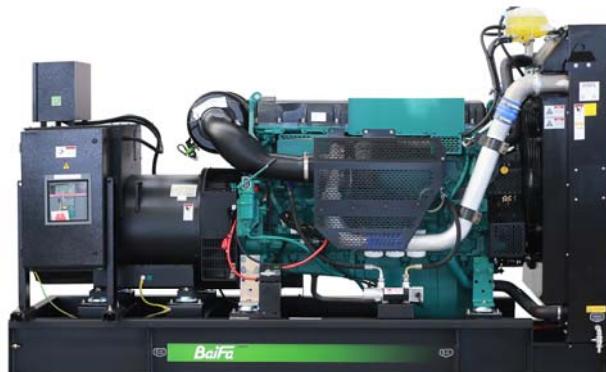


**MODEL: BF-V660B****400V | 1500rpm | 50Hz****ESP**

Standby Power

660 kVA**PRP**

Prime Power

600 kVA**ENGINE****VOLVO****TAD1642GE-B****ALTERNATOR****STAMFORD****S5L1D-E41**

GENERAL FEATURES

Engine: VOLVO TAD1642GE-B

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-V660B****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	866	528/660	480/600
415/240	50	3	0.8	918	528/660	480/600
400/230	50	3	0.8	953	528/660	480/600
380/220	50	3	0.8	1003	528/660	480/600

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-V660B****400V | 1500rpm | 50Hz**

ENGINE SPECIFICATION

Manufacturer / Model	VOLVO/TAD1642GE-B
Air intake system	Turbocharged, Air/Air inter cooling
Fuel system	Elec. Injection, Elec. Fuel System
Cylinder arrangement	6 in line
Displacement	16.12L
Bore and stroke	144*165 (mm)
Compression ratio	17
Rated speed	1500rpm
Max. Standby power at rated speed	565KW
Governor type	EMS2

Exhaust System

Exhaust gas flow	94.4 m ³ / min
Exhaust temperature	482°C
Max back pressure	10 kPa

Air Intake System

Max intake restriction	5 kPa
Combustion air flow	41.2 m ³ /min
Air flow required for radiator	456 m ³ /min

**MODEL: BF-V660B****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	193 g/kWh	117L/h
Fuel consumption @ 75% (Prime Power) Load	196 g/kWh	89L/h
Fuel consumption @ 50% (Prime Power) Load	198 g/kWh	61L/h

Oil System

Total oil capacity	48L
Oil consumption	0.11L/h
Oil sump capacity	32~42L

Cooling System

Coolant capacity	60 L
Max water temperature	103°C

**MODEL: BF-V660B****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	625kVA
Alternator Efficiency	94.8%

**MODEL: BF-V660B****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	≥±5%
Steady-state voltage deviation	≤±1%
Transient voltage deviation (100 % sudden power decrease)	≤+20%
Transient voltage deviation (sudden power increase)	≤-15%
Voltage recovery time (100 % sudden power decrease)	≤4S
Voltage recovery time (sudden power increase)	≤4S
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	≤0.5%
Transient frequency deviation (100 % sudden power decrease)	≤+10%
Transient frequency deviation (sudden power increase)	≤-7%
Frequency recovery time (100 % sudden power decrease)	≤3S
Frequency recovery time (sudden power increase)	≤3S

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special coolant

MCCB

**MODEL: BF-V660B****400V | 1500rpm | 50Hz**

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
-----------------	----------------	----------------------

Alternator heater	Soundproof type	Paralleling system
-------------------	-----------------	--------------------

Spare parts	Trailer type	Switch box
-------------	--------------	------------


Automatic transfer switch		
---------------------------	--	--

DIMENSIONS & WEIGHT

Standard Configuration (open type)

Overall Dimensions: 3350×1250×2050 mm


Weight: 3610 kg

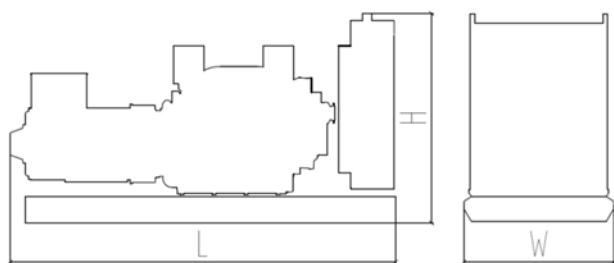

Soundproof Type

Overall Dimensions: 4630×1660×2250 mm

Weight: 5590 kg

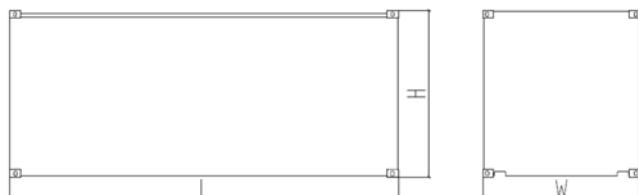

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.**WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633****Comprehensive Solutions For****POWER GENERATION**