

MODEL: BF-BD1500

400V | 1500rpm | 50Hz



ESP Standby Power	1500 kVA	PRP Prime Power	1375 kVA
ENGINE	Baudouin 12M33G1500/5	ALTERNATOR	STAMFORD S6L1D-H4

GENERAL FEATURES

Engine: Baudouin 12M33G1500/5

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-BD1500****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	1968	1200kW/1500kVA	1100kW/1375kVA
415/240	50	3	0.8	2087	1200kW/1500kVA	1100kW/1375kVA
400/230	50	3	0.8	2165	1200kW/1500kVA	1100kW/1375kVA
380/220	50	3	0.8	2279	1200kW/1500kVA	1100kW/1375kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-BD1500

400V | 1500rpm | 50Hz

ENGINE SPECIFICATION

Manufacturer / Model	Baudouin 12M33G1500/5
Air intake system	Turbo, intercooling
Fuel system	Mechanical pump
Cylinder arrangement	12 cylinders in V
Displacement	39.2 L
Bore and stroke	150×185 mm
Compression ratio	15:1
Rated speed	1500rpm
Max. Standby power at rated speed	1320KW
Governor type	Electronic

Exhaust System

Exhaust gas flow	277 m ³ /min
Exhaust temperature	550°C
Max back pressure	7.5 kPa

Air Intake System

Max intake restriction	6.5 kPa
Combustion air flow	97.3 m ³ /min
Air flow required for radiator	2100 m ³ /min

**MODEL: BF-BD1500****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	207.8 g/kWh	296.5 L/h
Fuel consumption @ 75% (Prime Power) Load	200.1 g/kWh	216.7 L/h
Fuel consumption @ 50% (Prime Power) Load	204.7 g/kWh	152.7 L/h

Oil System

Total oil capacity	160L
Oil consumption ratio based on fuel consumption data	$\leq 0.3 \%$
Oil sump capacity	117-155L

Cooling System

Coolant capacity	303L
Max water temperature	103°C



MODEL: BF-BD1500

400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	1400kVA
Alternator Efficiency	95.0%



MODEL: BF-BD1500

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	


MODEL: BF-BD1500

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

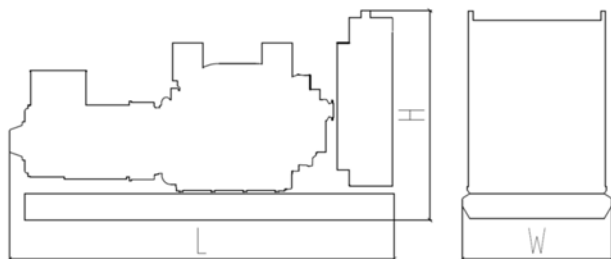

Standard Configuration (open type)

Overall Dimensions: 4750×2200×2430 mm

Weight: 9300 kg

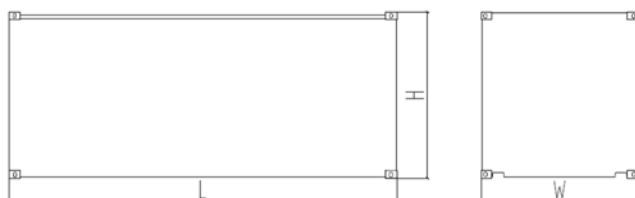

Soundproof Type (standard 20'ft HQ container)

Overall Dimensions: 6058×2438×2896 mm

Weight: 14300 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION