


MODEL: BF-C700Q-60

440V | 1800rpm | 60Hz

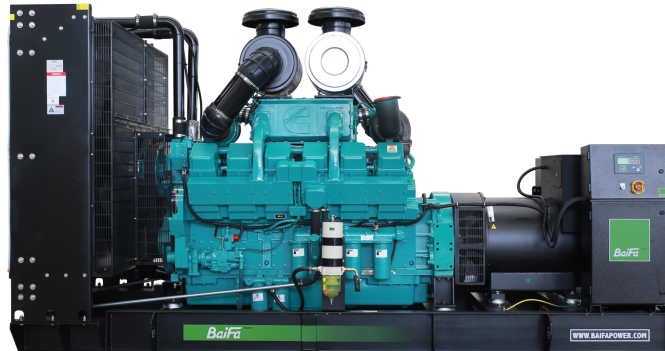

ESP Standby Power	750kVA	PRP Prime Power	688kVA
ENGINE	CCEC Cummins QSK19-G5	ALTERNATOR	STAMFORD HCI544E1

GENERAL FEATURES

Engine: CCEC Cummins QSK19-G5

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C700Q-60**440V | 1800rpm | 60Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	902	600kW/750kVA	550kW/688kVA
460/266	60	3	0.8	941	600kW/750kVA	550kW/688kVA
440/254	60	3	0.8	984	600kW/750kVA	550kW/688kVA
416/240	60	3	0.8	1041	600kW/750kVA	550kW/688kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-C700Q-60****440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins QSK19-G5
Air intake system	Turbocharged and Charge Air Cooled
Fuel system	Cummins MCRS
Cylinder arrangement	6 in line
Displacement	18.9L
Bore and stroke	159×159 mm
Compression ratio	15
Rated speed	1800rpm
Max. Standby power at rated speed	669kW
Governor type	ECU

Exhaust System

Exhaust gas flow	150.6 m ³ /min
Exhaust temperature	508°C
Max back pressure	6.8kPa

Air Intake System

Max intake restriction	6.2kPa
Combustion air flow	59.8 m ³ /min
Air flow required for radiator	900 m ³ /min

**MODEL: BF-C700Q-60****440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	212g/kWh	153L/h
Fuel consumption @ 75% (Prime Power) Load	211g/kWh	116L/h
Fuel consumption @ 50% (Prime Power) Load	226g/kWh	86L/h

Oil System

Total oil capacity	84.4L
Oil sump capacity	71.9 - 64.4L

Cooling System

Coolant capacity	41.6L(engine only)
Max water temperature	104°C

**MODEL: BF-C700Q-60****440V | 1800rpm | 60Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	713kVA
Alternator Efficiency	94.9%

**MODEL: BF-C700Q-60****440V | 1800rpm | 60Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
------------------------------	--	-----------

Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
-----------------	---	------

MODEL: BF-C700Q-60**440V | 1800rpm | 60Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 3750×1500×2200 mm

Weight: 4890 kg

**Soundproof Type**

Overall Dimensions: 5030×1860×2550 mm

Weight: 6850 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION