


MODEL: BF-C200Q

400V | 1500rpm | 50Hz

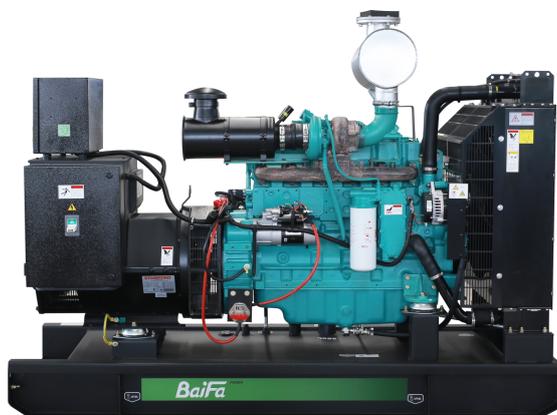

ESP Standby Power	200 kVA	PRP Prime Power	180 kVA
ENGINE	DCEC Cummins	ALTERNATOR	STAMFORD
	QSB6.7-G4		UCI274G1

GENERAL FEATURES

Engine: DCEC Cummins QSB6.7-G4

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C200Q**400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	262	160/200	144/180
415/240	50	3	0.8	278	160/200	144/180
400/230	50	3	0.8	289	160/200	144/180
380/220	50	3	0.8	304	160/200	144/180

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

MODEL: BF-C200Q**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Cummins QSB6.7-G4
----------------------	-------------------

Air intake system	Turbocharged & Air-air intercooling
-------------------	-------------------------------------

Fuel system	Common rail
-------------	-------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	6.7L
--------------	------

Bore and stroke	107 × 124 mm
-----------------	--------------

Compression ratio	17.3
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	185kW/248hp
-----------------------------------	-------------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	28.8 m ³ /min
------------------	--------------------------

Exhaust temperature	494 °C
---------------------	--------

Max back pressure	10kPa
-------------------	-------

Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	12.9 m ³ /min
---------------------	--------------------------

Air flow required for radiator	238 m ³ /min
--------------------------------	-------------------------

Comprehensive Solutions For

POWER GENERATION



MODEL: BF-C200Q

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	213 g/kWh	41.4 L/h
Fuel consumption @ 75% (Prime Power) Load	225 g/kWh	33.1 L/h
Fuel consumption @ 50% (Prime Power) Load	240 g/kWh	24.2 L/h

Oil System

Total oil capacity	19.5
Oil consumption	≤4g/kwh
Oil sump capacity	15~17.5

Cooling System

Coolant capacity	56L
Max water temperature	104°C



MODEL: BF-C200Q
400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	182kVA
Alternator Efficiency	92.3%

MODEL: BF-C200Q**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools
Base fuel tank	MCCB	


MODEL: BF-C200Q

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

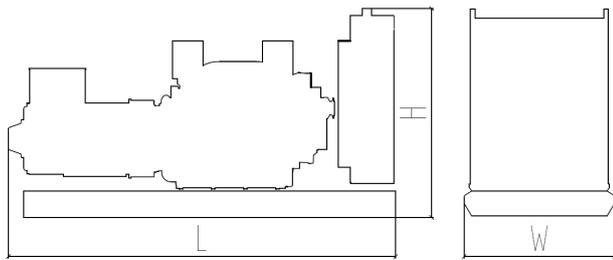

Standard Configuration (open type with base fuel tank)

Overall Dimensions: 2450×900×1550 mm

Weight: 1800 kg

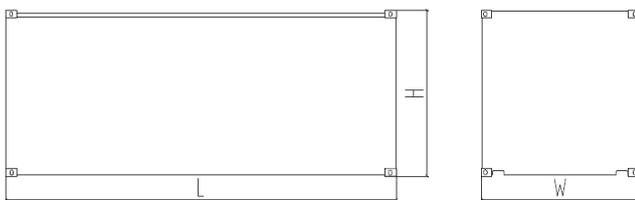

Soundproof Type

Overall Dimensions: 3590×1150×2050 mm

Weight: 2450 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

