

**MODEL: BF-C550****400V | 1500rpm | 50Hz****ESP**

Standby Power

550 kVA**ENGINE****CCEC Cummins****KTA19-G3A****PRP**

Prime Power

500 kVA**STAMFORD****S5L1D-C4**

GENERAL FEATURES

Engine: CCEC Cummins KTA19-G3A

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

Comprehensive Solutions For

POWER GENERATION**BaiFa** POWER

MODEL: BF-C550

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	722	440/550	400/500
415/240	50	3	0.8	765	440/550	400/500
400/230	50	3	0.8	794	440/550	400/500
380/220	50	3	0.8	836	440/550	400/500

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-C550****400V | 1500rpm | 50Hz**

ENGINE SPECIFICATION

Manufacturer / Model	CCEC Cummins KTA19-G3A
Air intake system	Turbo, Water/Air cooling
Fuel system	PT type fuel pump, EFC
Cylinder arrangement	6 in line
Displacement	18.9L
Bore and stroke	159*159 (mm)
Compression ratio	13.9:1
Rated speed	1500rpm
Max. Standby power at rated speed	504KW/675HP
Governor type	Electronic

Exhaust System

Exhaust gas flow	96.24 m ³ /min
Exhaust temperature	557 °C
Max back pressure	10kPa

Air Intake System

Max intake restriction	6.23kPa
Combustion air flow	34.74 m ³ /min
Air flow required for radiator	900 m ³ /min

**MODEL: BF-C550****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	203 g/kWh	104.7 L/h
Fuel consumption @ 75% (Prime Power) Load	207 g/kWh	80.0 L/h
Fuel consumption @ 50% (Prime Power) Load	N/A	N/A

Oil System

Total oil capacity	50L
Oil consumption	≤4g/kwh
Oil sump capacity	32~38L

Cooling System

Coolant capacity	100L
Max water temperature	104 °C

MODEL: BF-C550

400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	500kVA
Alternator Efficiency	93.8%

MODEL: BF-C550

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	≥±5%
Steady-state voltage deviation	≤±1%
Transient voltage deviation (100 % sudden power decrease)	≤+25%
Transient voltage deviation (sudden power increase)	≤-20%
Voltage recovery time (100 % sudden power decrease)	≤6S
Voltage recovery time (sudden power increase)	≤6S
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	≤1.5%
Transient frequency deviation (100 % sudden power decrease)	≤+12%
Transient frequency deviation (sudden power increase)	≤-10%
Frequency recovery time (100 % sudden power decrease)	≤5S
Frequency recovery time (sudden power increase)	≤5S

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools

MCCB

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-C550****400V | 1500rpm | 50Hz**

OPTIONS


Daily fuel tank	Rainproof type	Remote control panel
-----------------	----------------	----------------------

Alternator heater	Soundproof type	Paralleling system
-------------------	-----------------	--------------------

Spare parts	Trailer type	Switch box
-------------	--------------	------------

Automatic transfer switch		
---------------------------	--	--


DIMENSIONS & WEIGHT

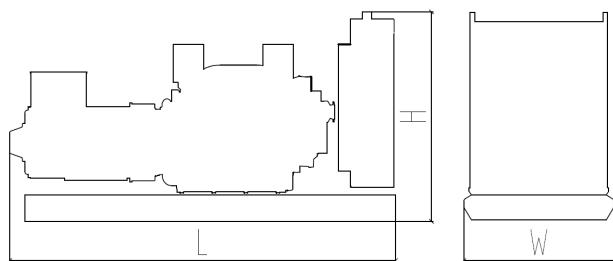

Standard Configuration (open type)

Overall Dimensions: 3450×1400×2100 mm

Weight: 4040 kg

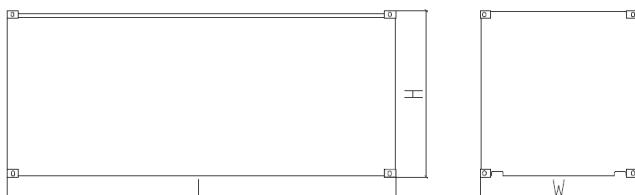

Soundproof Type

Overall Dimensions: 4630×1660×2250 mm

Weight: 5700 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.**WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633****Comprehensive Solutions For****POWER GENERATION****BaiFa** POWER