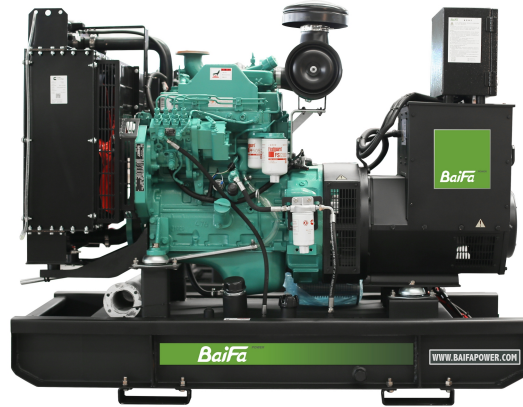


MODEL: BF-C65

400V | 1500rpm | 50Hz



ESP Standby Power	65 kVA	PRP Prime Power	60 kVA
ENGINE	DCEC Cummins 4BTA3.9-G2	ALTERNATOR	STAMFORD S1L2-Y1

GENERAL FEATURES

Engine: DCEC Cummins 4BTA3.9-G2

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

Comprehensive Solutions For
POWER GENERATION

MODEL: BF-C65

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	85	52/65	48/60
415/240	50	3	0.8	90	52/65	48/60
400/230	50	3	0.8	93	52/65	48/60
380/220	50	3	0.8	98	52/65	48/60

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-C65****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	DCEC Cummins 4BTA3.9-G2
----------------------	-------------------------

Air intake system	Turbo, Water/Air DC
-------------------	---------------------

Fuel system	AD type fuel pump
-------------	-------------------

Cylinder arrangement	4 in line
----------------------	-----------

Displacement	3.9L
--------------	------

Bore and stroke	102*120 (mm)
-----------------	--------------

Compression ratio	17.3:1
-------------------	--------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	64KW/86HP
-----------------------------------	-----------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	9.9 m ³ /min
------------------	-------------------------

Exhaust temperature	560 °C
---------------------	--------

Max back pressure	10kPa
-------------------	-------

Air Intake System

Max intake restriction	6kPa
------------------------	------

Combustion air flow	3.6 m ³ /min
---------------------	-------------------------

Air flow required for radiator	158 m ³ /min
--------------------------------	-------------------------

**MODEL: BF-C65****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	213 g/kWh	13.8 L/h
Fuel consumption @ 75% (Prime Power) Load	219 g/kWh	10.5 L/h
Fuel consumption @ 50% (Prime Power) Load	230 g/kWh	7.4 L/h

Oil System

Total oil capacity	11L
Oil consumption	≤4g/kwh
Oil sump capacity	8.5~9.5L

Cooling System

Coolant capacity	24L
Max water temperature	100℃

**MODEL: BF-C65****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	62.5kVA
Alternator Efficiency	89.9%

**MODEL: BF-C65****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free & watering-free) with connective wires

Special tools

Base fuel tank

MCCB

MODEL: BF-C65**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

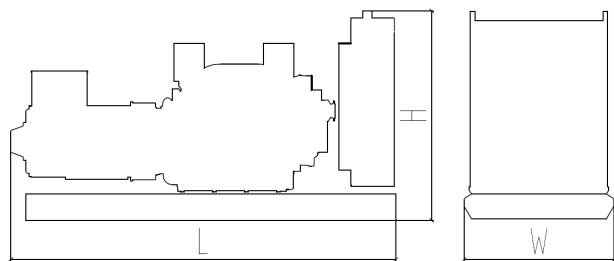
Paralleling system

Spare parts

Trailer type

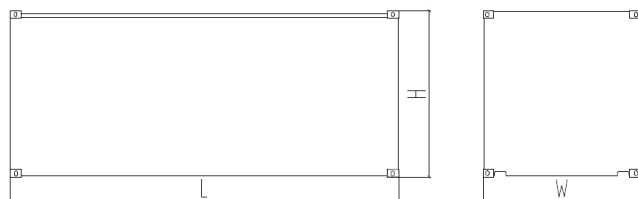
Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type with base fuel tank)**

Overall Dimensions: 1920×770×1370 mm

Weight: 980 kg

**Soundproof Type**

Overall Dimensions: 2440×1060×1680 mm

Weight: 1450 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION