

MODEL: BF-DW1000

400V | 1500rpm | 50Hz



ESP Standby Power	1000 kVA	PRP Prime Power	910 kVA
ENGINE	Doosan	ALTERNATOR	STAMFORD
	DP222CC		S6L1D-D4

GENERAL FEATURES

Engine: Doosan DP222CC

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-DW1000

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	1312	800kW/1000kVA	728kW/910kVA
415/240	50	3	0.8	1391	800kW/1000kVA	728kW/910kVA
400/230	50	3	0.8	1443	800kW/1000kVA	728kW/910kVA
380/220	50	3	0.8	1519	800kW/1000kVA	728kW/910kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-DW1000**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Doosan DP222CC
----------------------	----------------

Air intake system	Turbo, Air/Air cooling
-------------------	------------------------

Fuel system	BOSCH common rail
-------------	-------------------

Cylinder arrangement	12 in V
----------------------	---------

Displacement	21.927L
--------------	---------

Bore and stroke	128×142 mm
-----------------	------------

Compression ratio	14.6:1
-------------------	--------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	875KW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	147 m ³ /min
------------------	-------------------------

Exhaust temperature	535°C
---------------------	-------

Max back pressure	5.9kPa
-------------------	--------

Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	53 m ³ /min
---------------------	------------------------

Air flow required for radiator	1266 m ³ /min
--------------------------------	--------------------------

Comprehensive Solutions For

POWER GENERATION



MODEL: BF-DW1000

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	190 L/h
Fuel consumption @ 75% (Prime Power) Load	147 L/h
Fuel consumption @ 50% (Prime Power) Load	102 L/h

Oil System

Total oil capacity	75L
Oil sump capacity	23-75L

Cooling System

Coolant capacity	166L
Max water temperature	103°C



MODEL: BF-DW1000**400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	940kVA
Alternator Efficiency	95.0%

MODEL: BF-DW1000**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB



MODEL: BF-DW1000

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

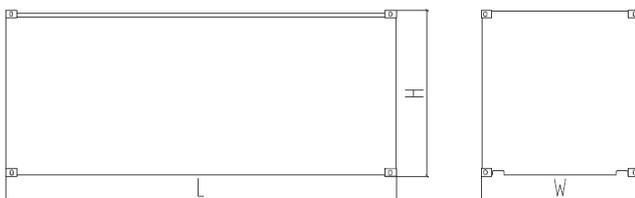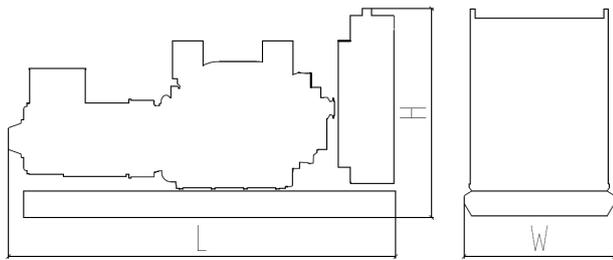

Standard Configuration (open type)

Overall Dimensions: 3700×1650×2250 mm

Weight: 5200 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 3700×1650×2250 mm

Weight: 5300 kg

Soundproof Type (standard 20'ft GP container)

Overall Dimensions: 6058×2438×2591 mm

Weight: 10300 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

