


MODEL: BF-M2500-60

440V | 1800rpm | 60Hz

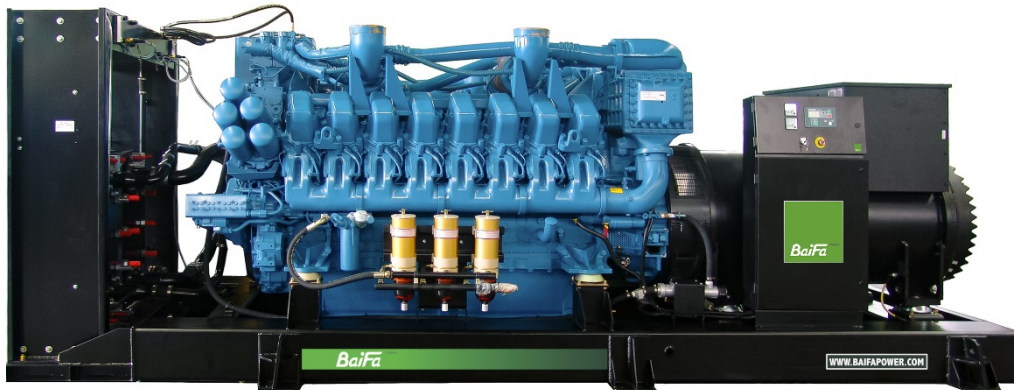

ESP

Standby Power

2750kVA

PRP

Prime Power

2500kVA

ENGINE

MTU

16V4000G24S

ALTERNATOR

STAMFORD

PI734G1

GENERAL FEATURES

Engine: MTU 16V4000G24S

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by motor, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-M2500-60**440V | 1800rpm | 60Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	3308	2200kW/2750kVA	2000kW/2500kVA
460/266	60	3	0.8	3452	2200kW/2750kVA	2000kW/2500kVA
440/254	60	3	0.8	3609	2200kW/2750kVA	2000kW/2500kVA
416/240	60	3	0.8	3817	2200kW/2750kVA	2000kW/2500kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-M2500-60****440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	MTU 16V4000G24S
----------------------	-----------------

Air intake system	Turbocharged, water/air intercooling
-------------------	--------------------------------------

Fuel system	Electronic Fuel Injection System
-------------	----------------------------------

Cylinder arrangement	16 in V
----------------------	---------

Displacement	76.3L
--------------	-------

Bore and stroke	170×210 mm
-----------------	------------

Compression ratio	16.4
-------------------	------

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	2508kW
-----------------------------------	--------

Governor type	ADEC
---------------	------

Exhaust System

Exhaust gas flow	504 m ³ /min
------------------	-------------------------

Exhaust temperature	505°C
---------------------	-------

Max back pressure	8.5kPa
-------------------	--------

Air Intake System

Max intake restriction	5kPa
------------------------	------

Combustion air flow	192 m ³ /min
---------------------	-------------------------

Air flow required for radiator	2340 m ³ /min
--------------------------------	--------------------------



MODEL: BF-M2500-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	200g/kWh	508L/h
Fuel consumption @ 75% (Prime Power) Load	198g/kWh	380L/h
Fuel consumption @ 50% (Prime Power) Load	207g/kWh	271L/h

Oil System

Total oil capacity	300L
Oil consumption	0.3% of Fuel Consumption
Oil sump capacity	210-240L

Cooling System

Coolant capacity	507L
Max water temperature	102°C



**MODEL: BF-M2500-60****440V | 1800rpm | 60Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	2535kVA
Alternator Efficiency	96.0%

**MODEL: BF-M2500-60****440V | 1800rpm | 60Hz**

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free & watering-free) with connective wires

Fuel-Water separator

Special coolant

MODEL: BF-M2500-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system


Spare parts

Trailer type

Switch box

Automatic transfer switch


DIMENSIONS & WEIGHT

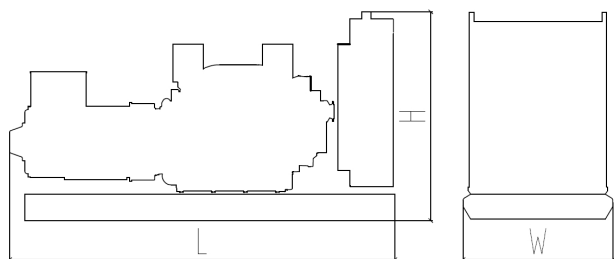

Standard Configuration (open type)

Overall Dimensions: 6900×2350×2600 mm

Weight: 16600kg

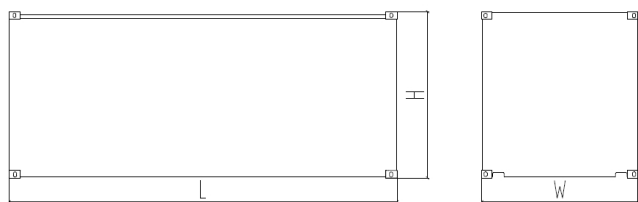

Soundproof Type (standard 40'ft HQ container)

Overall Dimensions: 12192×2438×2896 mm

Weight: 26600kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For

POWER GENERATION