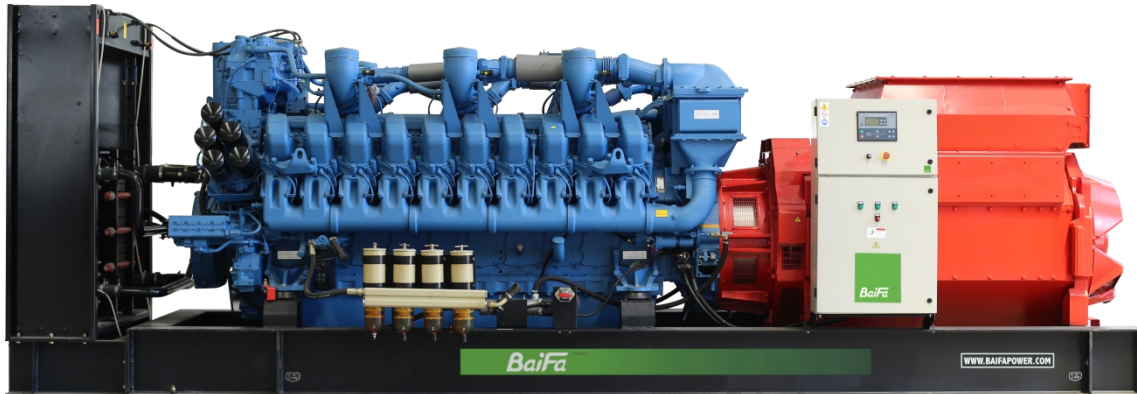


MODEL: BF-M3250
400V | 1500rpm | 50Hz


ESP Standby Power	3250 kVA	PRP Prime Power	3000 kVA
ENGINE	MTU 20V4000G63L	ALTERNATOR	LEROY SOMER LSA 53.2 M9

GENERAL FEATURES

Engine: MTU 20V4000G63L

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by motor, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-M3250****400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	4265	2600/3250	2400/3000
415/240	50	3	0.8	4521	2600/3250	2400/3000
400/230	50	3	0.8	4691	2600/3250	2400/3000
380/220	50	3	0.8	4938	2600/3250	2400/3000

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-M3250****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	MTU/20V4000G63L
Air intake system	Turbocharged, water/air inter cooling
Fuel system	Electronic Fuel Injection System
Cylinder arrangement	20 in V
Displacement	95.4L
Bore and stroke	170×210 mm
Compression ratio	16.4:1
Rated speed	1500 rpm
Max. Standby power at rated speed	2849kW (without fan)
Governor type	ADEC

Exhaust System

Exhaust gas flow	528 m ³ / min
Exhaust temperature	585 °C
Max back pressure	8.5 kPa

Air Intake System

Max intake restriction	5 kPa
Combustion air flow	192 m ³ /min
Air flow required for radiator	3600 m ³ /min

**MODEL: BF-M3250****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	192 g/kWh	581 L/h
Fuel consumption @ 75% (Prime Power) Load	192 g/kWh	439 L/h
Fuel consumption @ 50% (Prime Power) Load	200 g/kWh	311 L/h

Oil System

Total oil capacity	390 L
Oil consumption	0.3% Fuel Consumption
Oil sump capacity	245~340L

Cooling System

Coolant capacity	610 L
Max water temperature	104°C



**MODEL: BF-M3250****400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION****Alternator Data**

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	3000 kVA
Alternator Efficiency	96.1%

**MODEL: BF-M3250****400V | 1500rpm | 50Hz**

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Comap standard auto control system	Exhaust system(including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Fuel-Water separator
Special coolant		

MODEL: BF-M3250**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type


Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 8000×3000×2850 mm

Weight: 21300 kg

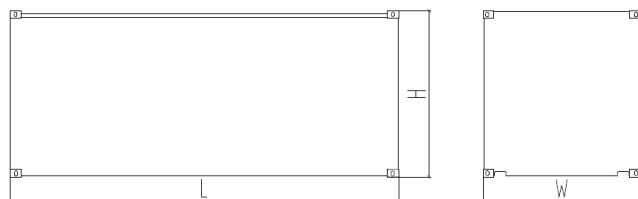**Soundproof Type (standard 40'ft HQ container)**

Overall Dimensions: 12192×2438×2896mm

Weight: 31200kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION