


MODEL: BF-P825

400V | 1500rpm | 50Hz

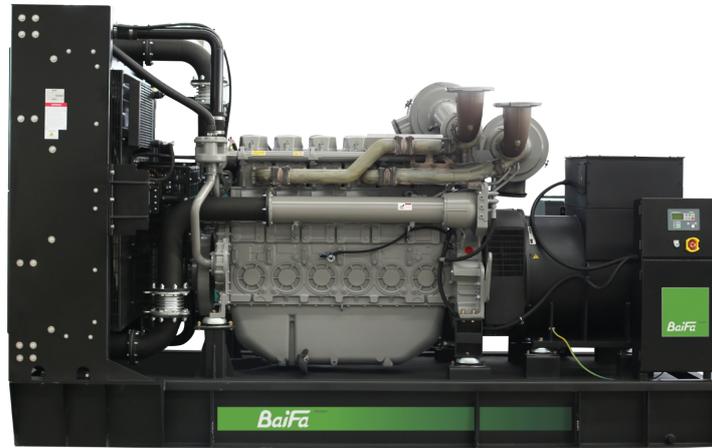

ESP Standby Power	825 kVA	PRP Prime Power	750 kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	4006-23TAG2A		S5L1D-H4

GENERAL FEATURES

Engine: Perkins 4006-23TAG2A	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: BF-P825

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	1083	660kW/825kVA	600kW/750kVA
415/240	50	3	0.8	1148	660kW/825kVA	600kW/750kVA
400/230	50	3	0.8	1191	660kW/825kVA	600kW/750kVA
380/220	50	3	0.8	1253	660kW/825kVA	600kW/750kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-P825**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 4006-23TAG2A
----------------------	----------------------

Air intake system	Turbocharged
-------------------	--------------

Fuel system	Direct Injection
-------------	------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	22.92L
--------------	--------

Bore and stroke	160×190 mm
-----------------	------------

Compression ratio	13.6:1
-------------------	--------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	721kW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	180 m ³ /min
------------------	-------------------------

Exhaust temperature	430°C
---------------------	-------

Max back pressure	6.1kPa
-------------------	--------

Air Intake System

Max intake restriction	3.8kPa
------------------------	--------

Combustion air flow	71 m ³ /min
---------------------	------------------------

Air flow required for radiator	800 m ³ /min
--------------------------------	-------------------------

Comprehensive Solutions For

POWER GENERATION



MODEL: BF-P825

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	210 g/kWh	161 L/h
Fuel consumption @ 75% (Prime Power) Load	213 g/kWh	123 L/h
Fuel consumption @ 50% (Prime Power) Load	218 g/kWh	86 L/h

Oil System

Total oil capacity	113L
Oil consumption as a percentage of full load fuel consumption less than	0.25%(As a percentage of fuel consumption)
Oil sump capacity	90.7-113L

Cooling System

Coolant capacity	105L
Max water temperature	98°C



MODEL: BF-P825
400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	750kVA
Alternator Efficiency	94.6%

MODEL: BF-P825**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB


MODEL: BF-P825

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

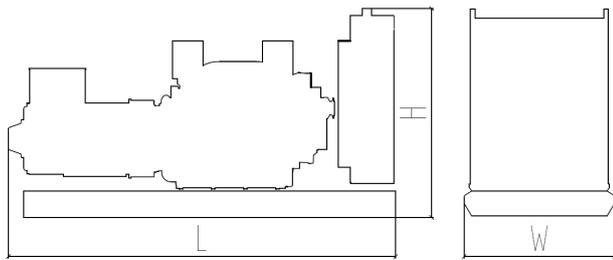

Standard Configuration (open type)

Overall Dimensions: 3965×1710×2200 mm

Weight: 5480 kg

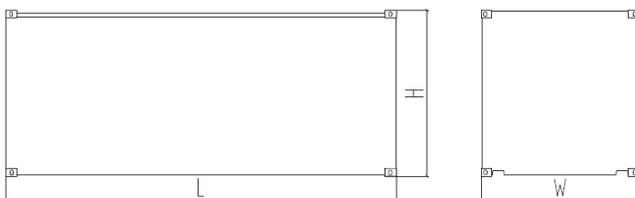

Soundproof Type

Overall Dimensions: 5800×1800×2550 mm

Weight: 7530 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

