


MODEL: BF-SC360

400V | 1500rpm | 50Hz

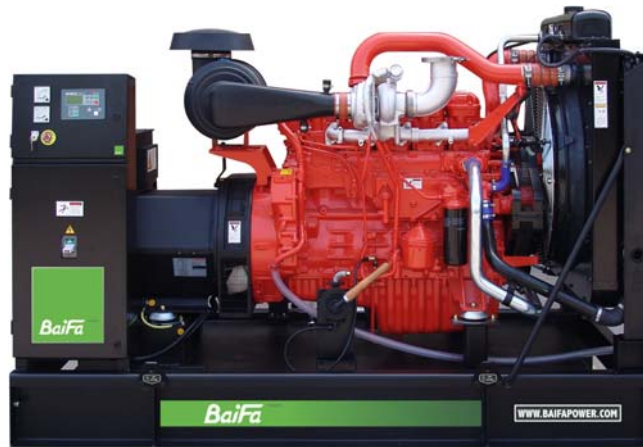

ESP Standby Power	357kVA	PRP Prime Power	325kVA
ENGINE	Scania DC09 072A 02-14	ALTERNATOR	STAMFORD S4L1D-E41

GENERAL FEATURES

Engine: Scania DC09 072A 02-14

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-SC360****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	469	286kW/357kVA	260kW/325kVA
415/240	50	3	0.8	497	286kW/357kVA	260kW/325kVA
400/230	50	3	0.8	516	286kW/357kVA	260kW/325kVA
380/220	50	3	0.8	543	286kW/357kVA	260kW/325kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-SC360****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Scania DC09 072A 02-14
Air intake system	Turbo, Air/Air Cooling
Fuel system	Electronic Injection
Cylinder arrangement	5 in line
Displacement	9.3L
Bore and stroke	130×140 mm
Compression ratio	16:1
Rated speed	1500rpm
Max. Standby power at rated speed	317kW
Governor type	EMS

Exhaust System

Exhaust gas flow	25kg/min
Exhaust temperature	525°C
Max back pressure	10kPa

Air Intake System

Max intake restriction	6.5kPa
Combustion air flow	24kg/min
Air flow required for radiator	180kg/min

**MODEL: BF-SC360****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	197g/kWh	66L/h
Fuel consumption @ 75% (Prime Power) Load	189g/kWh	47L/h
Fuel consumption @ 50% (Prime Power) Load	191g/kWh	32L/h

Oil System

Total oil capacity	36L
Oil consumption ratio based on fuel consumption data	$\leq 0.2\text{g/kWh}$
Oil sump capacity	31-36L

Cooling System

Coolant capacity	37L
Max water temperature	95°C



MODEL: BF-SC360

400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	360kVA
Alternator Efficiency	93.3%

MODEL: BF-SC360

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB


MODEL: BF-SC360

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

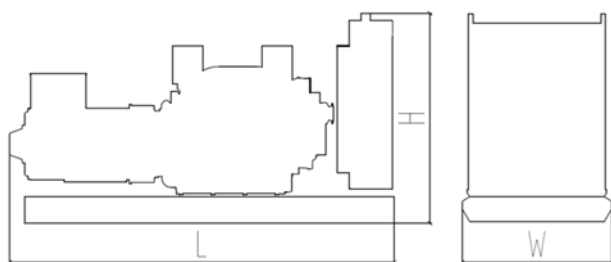

Standard Configuration (open type)


Overall Dimensions: 2840×1270×1790 mm

Weight: 2400 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 2840×1270×1795 mm

Weight: 2425 kg

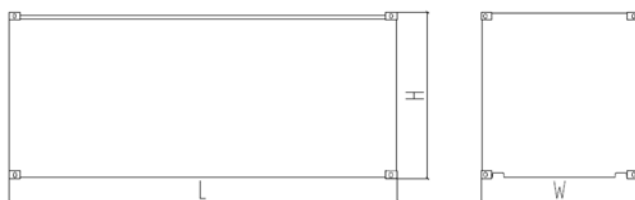

Soundproof Type

Overall Dimensions: 3890×1460×2150 mm

Weight: 3315 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION