


MODEL: BF-V720

400V | 1500rpm | 50Hz

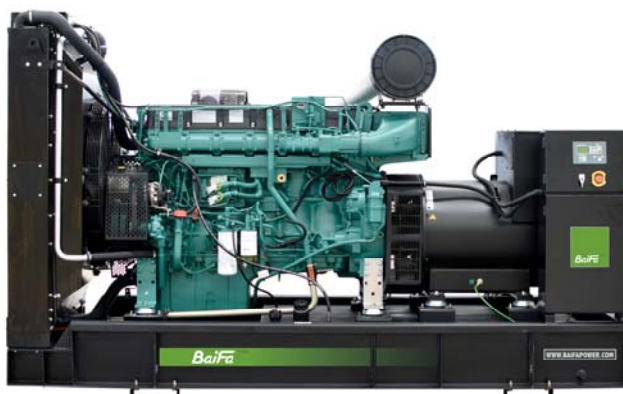

ESP Standby Power	720 kVA	PRP Prime Power	650 kVA
ENGINE	VOLVO	ALTERNATOR	STAMFORD
	TWD1644GE		S5L1D-F41

GENERAL FEATURES

Engine: VOLVO TWD1644GE

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-V720****400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	945	576/720	520/650
415/240	50	3	0.8	1002	576/720	520/650
400/230	50	3	0.8	1039	576/720	520/650
380/220	50	3	0.8	1094	576/720	520/650

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-V720****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TWD1644GE
----------------------	-----------------

Air intake system	Turbocharged, Water/Air inter cooling
-------------------	---------------------------------------

Fuel system	Elec. Injection, Elec. Fuel System
-------------	------------------------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	16.12L
--------------	--------

Bore and stroke	144*165 (mm)
-----------------	--------------

Compression ratio	16.8
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	609KW
-----------------------------------	-------

Governor type	EMS2
---------------	------

Exhaust System

Exhaust gas flow	100 m ³ / min
------------------	--------------------------

Exhaust temperature	485°C
---------------------	-------

Max back pressure	10 kPa
-------------------	--------

Air Intake System

Max intake restriction	5 kPa
------------------------	-------

Combustion air flow	42 m ³ /min
---------------------	------------------------

Air flow required for radiator	684 m ³ /min
--------------------------------	-------------------------

**MODEL: BF-V720****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	194 g/kWh	130 L/h
Fuel consumption @ 75% (Prime Power) Load	194 g/kWh	98 L/h
Fuel consumption @ 50% (Prime Power) Load	196 g/kWh	68 L/h

Oil System

Total oil capacity	48L
Oil consumption	0.11L/h
Oil sump capacity	32~42L

Cooling System

Coolant capacity	151 L
Max water temperature	107°C

**MODEL: BF-V720****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	670kVA
Alternator Efficiency	95.0%

**MODEL: BF-V720****400V | 1500rpm | 50Hz**

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free & watering-free) with connective wires

Special coolant

MCCB

MODEL: BF-V720

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch


DIMENSIONS & WEIGHT



Standard Configuration (open type)

Overall Dimensions: 3500×1400×2050 mm

Weight: 4100 kg

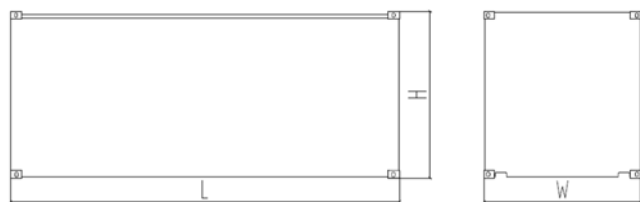

Soundproof Type

Overall Dimensions: 5030×1660×2550 mm

Weight: 6100 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION