



CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE PERFORMANCE CURVE

CONFIGURATION
D193056DX02

ENGINE MODEL: KTA19-G2

CURVE NUMBER: FR4126

CPL No.: 0886

DATE: 2023/1/16



Displacement: 19L (1150) Aspiration: Turbocharged, Aftercooled
BoreXStroke: 159X159mm (6.25X6.25 in.) Fuel System: Cummins PT
Compress Ratio: 14.5:1 No. of Cylinder: 6
60Hz Standby: 448 kW(600 BHP)@1800 r/min
50Hz Standby: 369 kW(495 BHP)@1500 r/min

Rating
All data is based on the engine operating with fuel system, water pump, and 20 in. H₂O(4.98kPa) inlet air restriction with 5.8 in.(147mm) inner diameter, and with 2 in. Hg(7kPa) exhaust restriction with 8 in.(203mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolant as 50% ethylene glycol/50% water. All data is subject to change without notice.

GROSS ENGINE POWER OUTPUT

SPEED rpm	STANDBY POWER		PRIME POWER		CONTINUOUS POWER	
	BHP	kW	BHP	kW	BHP	kW
1800	600	448	525	392	450	336
1500	495	369	450	336	440	328

FUEL CONSUMPTION

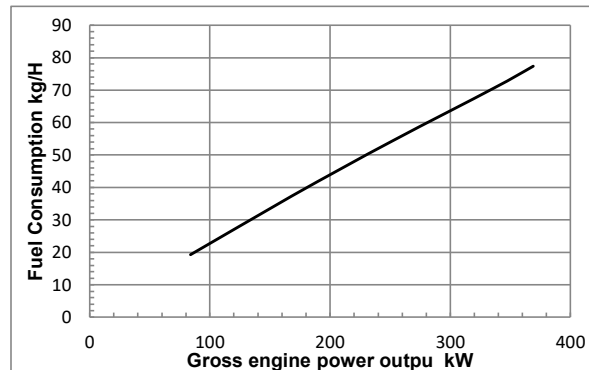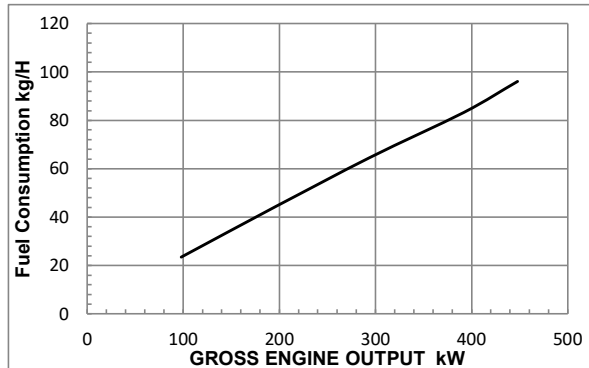

OUTPUT POWER			CONSUMPTION		BFSC	
%	BHP	kW	Lb/h	kg/h	g/kW.h	Lb/BHP.h
1800RPM						
STNADBY						
100	600	448	212	96	214	0.353
PRIME						
100	525	392	184	83	213	0.350
75	394	294	142	65	220	0.361
50	263	196	98	44	226	0.371
25	131	98	52	23	239	0.394
CONTINUOUS						
100	450	336	159	72	215	0.354
1500RPM						
STANDBY						
100	495	369	171	77	210	0.345
PRIME						
100	450	336	156	71	210	0.345
75	338	252	120	54	216	0.355
50	225	168	82	37	222	0.365
25	113	84	43	19	230	0.377
CONTINUOUS						
100	440	328	153	70	212	0.349

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in. Hg(100kPa) barometric pressure [300ft.(91m) altitude] 77deg F (25 deg C) inlet temperature, and 0.30 in. Hg(1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2.

TECHNICAL DATA DEPT.

CERTIFIED WITHIN 5%
Cummins Confidential

CHIEF ENGINEER



POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

STANDBY POWER RATING is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not

CONTINUOUS POWER RATING

Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PRIME POWER RATING is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at Prime Power rating should use the Continuous Power rating.

Reference Standards:

BS-5514 and DIN-6271 standards are based on ISO-3046.

Operation At Elevated Temperature And Altitude:

The engine may be operated at:

1800RPM up to 5,000 ft.(1500m) and 104°F (40°C) without power deration.

1500RPM up to 4,300 ft.(1310m) and 104°F (40°C) without power deration.

For sustained operation above these conditions, derate by 4% per 1,000ft. (300m), and 1% per 10°F (2% per 11°C).



CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

ENGINE MODEL(S): KTA19-G2

STAND_BY: 448 kW(600 BHP)@1800 r/min
369 kW(495 BHP)@1500 r/min

PRIME: 392 kW(525 BHP)@1800 r/min
336 kW(450 BHP)@1500 r/min

REFERENCE INFORMATION:

CONFIGURATION..... D193056DX02
CPL NUMBER 0886
DATA SHEET..... FR4126
DATE..... 2023/1/16

GENERAL ENGINE DATA

Type..... 4 Cycle , In-line , 6 Cylinder
Aspiration..... Turbocharged,Aftercooled
Bore—in.(mm)×stroke—in.(mm)..... 6.25×6.25 (159×159)
Displacement—in³(L)..... 1150 (19)
Compression Ratio..... 14.5:1
Dry Weight
Fan Hub to Flywheel Engine —lb(kg)..... 3725 (1690)
Wet Weight
Fan Hub to Flywheel Engine —lb(kg)..... 3880 (1760)
Moment of Inertia of Rotating Components (Excluding Flywheel) —lb_m.ft²(kg•m²)..... 43.2 (1.82)
·With FW 4001 Flywheel —lb_m.ft²(kg•m²)..... 170.0 (7.16)
·With FW 4006 Flywheel —lb_m.ft²(kg•m²)..... 199.0 (8.39)
C.G. Distance From Rear Face of Flywheel Housing (FH4018)—in.(mm)..... 28.4 (721)
C.G. Distance Above Crank Centerline—in.(mm)..... 9.0 (229)
Maximum Allowable Atatic Load of Rear Main Bearing —lb(kg)..... 2000 (907)
Firing Order..... 1-5-3-6-2-4

ENGINE MOUNTING

Maximum Allowable Bending Moment at Rear Face of Block —lb.ft(N•m)..... 1000 (1356)

EXHAUST SYSTEM

Maximum Allowable Back Pressure —in.Hg(kPa)..... 3 (10)

AIR INDUCTION SYSTEM

Maximum Allowable Intake Air Restriction With Heavy Duty Air Cleaner

Dirty Element —in.H₂O(kPa)..... 25 (6.23)
Clean Element —in.H₂O(kPa)..... 15 (3.73)

COOLING SYSTEM

Coolant Capacity

Engine Only —U.S.Gal(L)..... 8.0 (30.3)
Minimum Allowable Pressure Cap @ sea level— PSI(kPa)..... 7 (48)
Maximum Coolant Friction Heat External to Engine @1800 rpm —PSI(kPa)..... 10.0 (68.9)
@1500 rpm —PSI(kPa)..... 8.0 (55.2)
Maximum Allowable Top Tank Temperature (Stand_by/Prime) —°F(°C)..... 220/212 (104/100)
Standard Thermostat (modulating) Range— °F(°C)..... 180-200 (82-93)
Maximum Coolant Pressure (Exclusive of Pressure Cap) —PSI(kPa)..... 15 (103)
Minimum Coolant Makeup Capacity —U.S.Gal(L)..... 1.6 (6.1)
Minimum Allowable Fill Rate —U.S.GPM(L/min)..... 5 (18.9)
Minimum Allowable Coolant Expansion Space —% of System Capacity..... 5
Maximum Allowable Deaeration Time —min..... 25

LUBRICATION SYSTEM

Oil Pressure

@ Idle —PSI(kPa)..... 20 (138)
@ Rated Speed —PSI(kPa)..... 50-70 (345-483)
Oil Flow at Rated Speed —U.S.GPM(L/min)..... 40 (151.4)
Maximum Allowable Oil Temperature —°F(°C)..... 250 (121.0)



CHONGQING CUMMINS ENGINE COMPANY LTD.

ENGINE DATA SHEET

By-Pass Filter Capacity

Spin-on Cartridge Type —U.S.Gal(L).....	0.7	(2.6)
Oil Pan Capacity (Option OP4019)		
High —U.S.Gal(L).....	10.0	(37.9)
Low —U.S.Gal(L).....	8.5	(32.2)
Total System Capacity (Including By-Pass Filter) —U.S.Gal(L).....	13.2	(50.0)
Angularly of Standard Oil Pan (Option OP4019)		
Front Down.....	30°	
Front Up.....	30°	

FUEL SYSTEM

Fuel Injection System..... Cummins PT

Maximum allowable Restriction to PT Fuel Pump

With Clean Fuel Filter —in.Hg(kPa).....	4	(13.55)
With Dirty Fuel Filter —in.Hg(kPa).....	8	(27.09)

Maximum Allowable Injector Return Line Restriction

With Check Valves —in.Hg(kPa).....	6.5	(22.0)
Less Check Valves —in.Hg(kPa).....	2.5	(8.5)

ELECTRICAL SYSTEM AND START SYSTEM

Starter (Heavy, Anode)—Volt.....	24
Battery Recharge System,Negative ground—A.....	35
Maximum Allowable Resistance of Starting Circuit—Ω.....	0.002
Minimum Recommended Battery Capacity	
·Cold Soak at 50°F(10°C) or Above—0°F CCA.....	600
·Cold Soak at 32~50°F(0~10°C) or Above—0°F CCA.....	640
·Cold Soak at 0~32°F(-18~0°C) or Above—0°F CCA.....	900

PERFORMANCE DATA

Stability at Any Invariablenes Load —%..... ±0.25

All data is based on the engine operating with fuel system, water pump, lubricating oil pump, air cleaner, and muffler, not included are alternator, compressor, fan, optional equipment and driven components. Data represents gross engine performance capabilities obtained and corrected in accordance with SAE J1349 conditions fo 29.61 in Hg(100 kPa) barometric pressure[300ft. (90 m) altitude], 77°F (25°C) inlet air temperature, and 0.30 in. Hg (1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2. All data is subject to change without notice.

	STAND_BY		PRIME	
	60 Hz	50 Hz	60 Hz	50 Hz
Engine Speed r/min.....	1800	1500	1800	1500
Idle Speed r/min.....	575-775	575-775	575-775	575-775
Gross Power Output BHP(kW).....	600 (448)	495 (369)	525 (392)	450 (336)
Brake Mean Effective Pressure PSI(kPa).....	228 (1574)	226 (1556)	200 (1377)	206 (1417)
Piston Speed ft/min(m/s).....	1870 (9.5)	1555 (7.9)	1870 (9.5)	1555 (7.9)
Friction Horsepower BHP(kW).....	83 (62)	54 (40)	83 (62)	54 (40)
Intake Air FlowCFM(L/s).....	1320 (623)	945 (446)	1231 (581)	915 (432)
Exhaust Gas Flow CFM(L/s).....	3600 (1699)	2630 (1241)	3269 (1543)	2530 (1194)
Exhaust Gas Temperature °F(°C).....	955 (513)	984 (529)	919 (493)	975 (524)
Heat Rejection to Ambient BTU/min(kW).....	3867 (68)	3128 (55)	3355 (59)	2843 (50)
Heat Rejection to Coolant BTU/min(kW).....	15582 (274)	12852 (226)	13648 (240)	11715 (206)
Engine Water Flow L/s(U.S.GPM) @ 3psi.....	197 (12.4)	162 (10.2)	197 (12.4)	162 (10.2)