



CHONGQING CUMMINS ENGINE COMPANY LTD.

ENGINE PERFORMANCE CURVE

CONFIGURATION
D233031DX02

ENGINE MODEL: KTA38-G9E

CURVE NUMBER: FR726

CPL No.: 4636

DATE: 2021/7/13

Displacement: 38L (2300 in3)
BoreXStroke: 159X159mm (6.25X6.25 in.)
Compress Ratio: 14.7:1

Aspiration: Turbocharged , Aftercooled
Fuel System: Cummins PT
No. of Cylinder: V-12


RATING
Stand by: 1100 kW(1475 BHP)@1500 r/min
Prime: 990 kW(1328 BHP)@1500 r/min

All data is based on the engine operating with fuel system, water pump, and 20 in. H₂O(4.98kPa) inlet air restriction with 5.8 in.(147mm) inner diameter, and with 2 in. Hg(7kPa) exhaust restriction with 8 in.(203mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolant as 50% ethylene glycol/50% water. All data is subject to change without notice.

GROSS ENGINE POWER OUTPUT

SPEED rpm	STANDBY POWER		PRIME POWER		CONTINUOUS POWER	
	BHP	kW	BHP	kW	BHP	kW
1500	1475	1100	1328	990	1180	880

FUEL CONSUMPTION

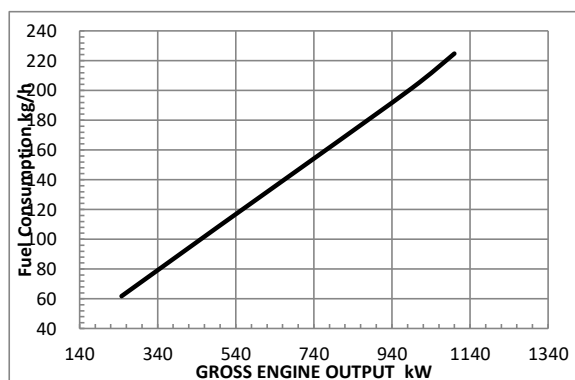

OUTPUT POWER			CONSUMPTION		BFSC	
%	BHP	kW	Lb/h	kg/h	g/kW.h	Lb/BHP.h
1500RPM						
STANDBY						
100	1475	1100	495	225	204	0.336
PRIME						
100	1328	990	444	201	203	0.334
75	996	743	341	155	208	0.343
50	664	495	239	108	219	0.360
25	332	248	136	62	249	0.410
CONTINUOUS						
100	1180	880	398	181	205	0.337

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in. Hg(100kPa) barometric pressure [300ft.(91m) altitude] 77deg F (25 deg C) inlet temperature, and 0.30 in. Hg(1kPa) water vapor pressure with No.2 diesel fuel.

TECHNICAL DATA DEPT.

CERTIFIED WITHIN 5%
Cummins Confidential

CHIEF ENGINEER



POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

STANDBY POWER RATING is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

CONTINUOUS POWER RATING

Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PRIME POWER RATING is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at Prime Power rating should use the Continuous Power rating.

Reference Standards:

BS-5514 and DIN-6271 standards are based on ISO-3046.

Operation At Elevated Temperature And Altitude:

The engine may be operated at:

1800RPM up to 5,000 ft. (1,500m) and 104°F (40°C) without power deration.

1500RPM up to 5,000 ft. (1,500m) and 104°F (40°C) without power deration.

For sustained operation above these conditions, derate by 4% per 1,000ft. (300m), and 1% per 10°F (2% per 11°C).



CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

ENGINE MODEL(S): KTA38-G9E**REFERENCE INFORMATION:**

STAND_BY: 1100 kW(1475 BHP)@1500 r/min

CPL NUMBER 4636

PRIME: 990 kW(1328 BHP)@1500 r/min

DATASHEET FR726

CONFIGURATION D233031DX02

DATE 2021/7/13

GENERAL ENGINE DATA

Type.....	4 Cycle , 60° Vee , 12 Cylinder
Aspiration.....	Turbocharged , Aftercooled
Bore— $\text{in. (mm)} \times \text{stroke—in. (mm)}$	6.25 $\times$ 6.25 (159 $\times$ 159)
Displacement— $\text{in}^3(\text{L})$	2300 (38)
Compression Ratio.....	14.7:1
Dry Weight	
Fan Hub to Flywheel Engine — lb (kg)	8555 (3880)
Wet Weight	
Fan Hub to Flywheel Engine — lb (kg)	9065 (4112)
Moment of Inertia of Rotating Components (Excluding Flywheel) — $\text{lb}_m.\text{ft}^2(\text{kg}\cdot\text{m}^2)$	94 (3.96)
·With FW 6001 Flywheel — $\text{lb}_m.\text{ft}^2(\text{kg}\cdot\text{m}^2)$	248.0 (10.45)
·With FW 6011 Flywheel — $\text{lb}_m.\text{ft}^2(\text{kg}\cdot\text{m}^2)$	493.0 (20.78)
C.G. Distance From Rear Face of Flywheel Housing (FH6024)— in (mm)	38.6 (980)
C.G. Distance Above Crank Centerline— in (mm)	11 (279)
Maximum Allowable Bending Moment at Rear Face of Block — $\text{N}\cdot\text{m (lb.ft)}$	2000 (907)
Firing Order.....	1R-6L-5R-2L-3R-4L-6R-1L-2R-5L-4R-3L

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block — $\text{lb.ft (N}\cdot\text{m)}$	3000 (4067)
--	-------------

EXHAUST SYSTEM

Maximum Allowable Back Pressure — in.Hg (kPa)	3 (10)
--	--------

AIR INDUCTION SYSTEM

Maximum Allowable Intake Air Restriction With Heavy Duty Air Cleaner

Dirty Element — $\text{in.H}_2\text{O (kPa)}$	25 (6.23)
Clean Element — $\text{in.H}_2\text{O (kPa)}$	15 (3.73)

COOLING SYSTEM

Coolant Capacity

Engine Only — U.S.Gal (L)	31.2 (118.1)
Minimum Allowable Pressure Cap @ sea level— PSI (kPa)	10 (69)
Maximum Pressure Drop Across Any External Cooling System Circuit — PSI (kPa)	5.0 (34.5)
Maximum Allowable Top Tank Temperature (Stand_by/Prime) — $^{\circ}\text{F (}^{\circ}\text{C)}$	220/212 (104/100)
Standard Thermostat (modulating) Range— $^{\circ}\text{F (}^{\circ}\text{C)}$	180-200 (82-93)
Maximum Coolant Pressure (Exclusive of Pressure Cap) — PSI (kPa)	15 (103)
Minimum Allowable Fill Rate — U.S.GPM (L/min)	5 (18.9)
Minimum Allowable Coolant Expansion Space —% of System Capacity.....	5
Maximum Allowable Deaeration Time —min.....	25



CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

LUBRICATION SYSTEM

Oil Pressure

@ Idle —PSI(kPa).....	20	(138)
@ Rated Speed —PSI(kPa).....	45-65	(310-448)
Oil Flow at Rated Speed —U.S.GPM(L/min).....	124	(469)
Maximum Allowable Oil Temperature —°F(°C).....	250	(121)
By-Pass Filter Capacity		
Spin-on Cartridge Type —U.S.Gal(L).....	2 X 0.7	(2 X 2.6)
Oil Pan Capacity (Option OP6024)		
High —U.S.Gal(L).....	30.0	(114.0)
Low —U.S.Gal(L).....	23.0	(87.4)
Total System Capacity (Excluding By-Pass Filter) —U.S.Gal(L).....	35.7	(135.1)
Angularity of Standard Oil Pan (Option OP6024)		
Front Down.....	30°	
Front Up.....	30°	

FUEL SYSTEM

Fuel Injection System.....	Cummins PT	
Maximum allowable Restriction to PT Fuel Pump		
With Clean Fuel Filter —in.Hg(kPa).....	4	(13.55)
With Dirty Fuel Filter —in.Hg(kPa).....	8	(27.09)
Maximum Allowable Injector Return Line Restriction		
With Check Valves —in.Hg(kPa).....	6.5	(22.0)
Less Check Valves —in.Hg(kPa).....	2.5	(8.5)
Minimum Allowable Fuel Tank Vent Capability —ft ³ /h (L/h)	15	(425)
(With 2.5 in. Hg (63 mm Hg) or Less Back Pressure)		
Starter (Heavy, Anode)—Volt.....	24	
Battery Recharge System,Negative ground—A.....	35	
Maximum Allowable Resistance of Starting Circuit—Ω.....	0.002	
Minimum Recommended Battery Capacity		
·Cold Soak at 50°F(10°C) or Above—0°F CCA.....	1200	
·Cold Soak at 32~50°F(0~10°C) or Above—0°F CCA.....	1280	
·Cold Soak at 0~32°F(-18~0°C) or Above—0°F CCA.....	1800	

PERFORMANCE DATA

All data is based on the engine operating with fuel system, water pump, lubricating oil pump, air cleaner, and muffler, not included are alternator, compressor, fan, optional equipment and driven components. Data represents gross engine performance capabilities obtained and corrected in accordance with SAE J1349 conditions to 29.61 in Hg(100 kPa) barometric pressure[300ft. (90 m) altitude], 77°F (25°C) inlet air temperature, and 0.30 in. Hg (1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2. All data is subject to change without notice.



CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

	STAND_BY		PRIME	
	60 Hz	50 Hz	60 Hz	50 Hz
Engine Speed r/min.....		1500		1500
Idle Speed r/min.....		700 ~ 800		700 ~ 800
Gross Power Output BHP(kW).....		1475 (1100)		1328 (990)
Brake Mean Effective Pressure PSI(kPa).....		336 (2316)		302 (2084)
Piston Speed ft/min(m/s).....		1565 (8.0)		1565 (8.0)
Friction Horsepower BHP(kW).....	N/A	115 (86)	N/A	115 (86)
Intake Air Flow lb/min(kg/h).....		206 (5609)		196 (5346)
Exhaust Gas Flow lb/min(kg/h).....		214 (5833)		204 (5548)
Exhaust Gas Temperature °F(°C).....		961 (516)		911 (488)
Heat Rejection to Ambient BTU/min(kW).....		3071 (54)		2848 (50)
Heat Rejection to Jacket Coolant BTU/min(kW).....		24920 (438)		22306 (392)
Heat Rejection to LTA BTU/min(kW).....		12909 (227)		11430 (201)

Engine Model: KTA38-G9E

Data Sheet: FR726

Date: 2021/7/13

CHONGQING CUMMINS ENGINE CO., LTD.

CHONGQING, CHINA, 400031