


	Engine Performance Data Cummins Inc. Columbus, Indiana 47202-3005 http://www.cummins.com	G-Drive QSK38-G14 FR60695	Date 14-Mar-22		
			Configuration D233053GX03	CPL 5720	Revision 1
Compression Ratio	14.2: 1	Displacement	2307 in ³ (37.8 L)		
Fuel System	Cummins YZ	Aspiration	Turbocharged and Charge Air Cooled		
Aftertreatment	N/A	Emission Certification	China CS III		

Engine Speed		Standby Power		Prime Power		Continuous Power	
rpm		kWm	bhp	kWm	bhp	kWm	bhp
1500		1489	1997	1346	1805	N/A	N/A
1800		N/A	N/A	N/A	N/A	N/A	N/A

Engine Fluid Consumption @ 1500 rpm

Output Power			Fuel			
%	kWm	bhp	kg/kWm-hr	lb/bhp-hr	L/hr	US gal/hr
Standby Power						
100	1489	1997	0.198	0.326	348	91.8
Prime Power						
100	1346	1805	0.208	0.342	329	86.9
75	1009	1354	0.215	0.354	256	67.5
50	673	903	0.221	0.363	175	46.2
25	336	451	0.245	0.403	97	25.6
Continuous Power						
100	0	0	0.000	0.000	0	0.0

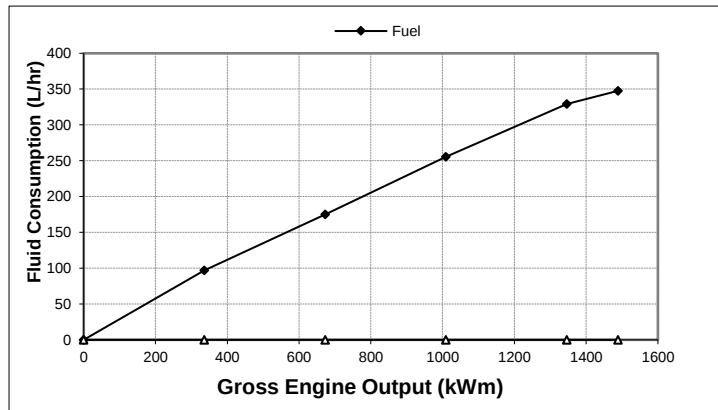


Data Subject to Change Without Notice


These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. STANDBY POWER RATING: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a Max of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. PRIME POWER RATING: Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: UNLIMITED TIME RUNNING PRIME POWER: Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. LIMITED TIME RUNNING PRIME POWER: Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. CONTINUOUS POWER RATING: Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.	Reference AEB 10.47 for determining Electrical Output.
	Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. Derates shown are based on 8.83 in H₂O air intake restriction and 2.54 in Hg exhaust back pressure. The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/L (7.1 lbs/US gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.
	Data Status : Production Tolerance : +/- 5% Chief Engineer: Abhishek Mehrotra

1,500 rpm Power Derate Curves

Standby Power

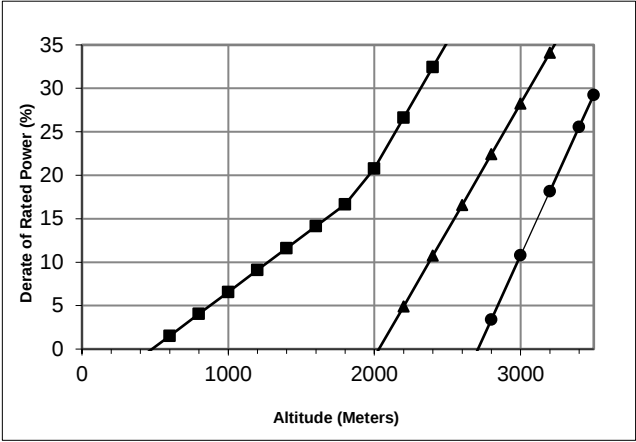

Prime Power

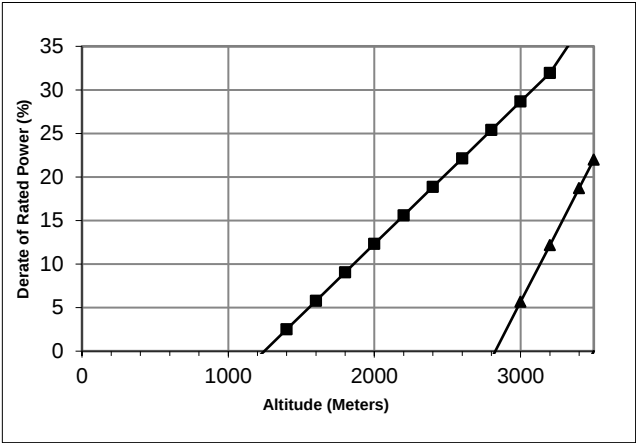

- ◆ 131 °F (55 °C)
- 122 °F (50 °C)
- ▲ 104 °F (40 °C)
- 77 °F (25 °C)

Operation At Elevated Temperature And Altitude:

For Standby Operation above these conditions, derate by an additional 11.1% per 1,000 ft (305 m), and 102.4% per 18 °F (10 °C).
For Prime Operation above these conditions, derate by an additional 10.4% per 1,000 ft (305 m), and 115.4% per 18 °F (10 °C).
For Continuous Operation above these conditions, derate by an additional N/A% per 1,000 ft (305 m), and N/A% per 18 °F (10 °C).

Operation At Elevated Temperature And Altitude:

For Standby Operation above these conditions, derate by an additional N/A% per 1,000 ft (305 m), and N/A% per 18 °F (10 °C).
For Prime Operation above these conditions, derate by an additional N/A% per 1,000 ft (305 m), and N/A% per 18 °F (10 °C).
For Continuous Operation above these conditions, derate by an additional N/A% per 1,000 ft (305 m), and N/A% per 18 °F (10 °C).

General Engine Data

Installation Drawing Number	5542563		
Type	Four Cycle; Vee; 12 Cylinder		
Aspiration	Turbocharged and Charge Air Cooled		
Bore x Stroke	in x in (mm x mm)	6.26 x 6.26	(159 x 159)
Displacement	in ³ (L)	2307	(37.8)
Compression Ratio	14.2: 1		
Dry Weight (Approximate)	lbm (kg)	9310	(4223)
Wet Weight (Approximate)	lbm (kg)	9863	(4474)
Aftertreatment Weight (Approximate)	lbm (kg)	N/A	(N/A)
Moment of Inertia of Rotating Components			
with FW6115 Flywheel, SAE 0	in • lbf • sec ² (kg • m ²)	96.5	(10.9)
Center of Gravity from Rear Face of Block	in (mm)	31.42	(798)
Center of Gravity Above Crankshaft Centerline	in (mm)	9.02	(229)

Engine Mounting

Max Bending Moment at Rear Face of Block	lb • ft (N • m)	4500	(6101)
--	-----------------	------	--------

Exhaust System

Max Allowable Static Bending Moment @ Exhaust Outlet Flange	lb • ft (N • m)	124	(168)
Max Back Pressure, Standby Power, Turbo Outlet (1500/1800rpm)	in Hg (kPa)	3.0 / N/A	(10.1 / N/A)

Air Induction System

Max Intake Air Restriction			
With Normal Duty Air Cleaner and Clean Filter Element	in H ₂ O (kPa)	15	(3.7)
With Heavy Duty Air Cleaner and Clean Filter Element	in H ₂ O (kPa)	15	(3.7)
With Dirty Filter Element	in H ₂ O (kPa)	25	(6.2)
Maximum allowable air temperature rise over ambient at Turbo Compressor inlet (Turbo-charged Engines):	Δ°F (Δ°C)	5	(3)

Cooling System**Jacket Water/ High Temperature Circuit Requirements**

Max Coolant Friction Head External to Engine (1500/1800 rpm)	psi (kPa)	10.0 / N/A	(69 / N/A)
Engine Water Flow at Stated Friction Head External to Engine:			
2.5 psi Friction Head (1500/1800 rpm)	US gpm (L/m)	392 / N/A	(1483 / N/A)
Maximum Friction Head (1500/1800 rpm)	US gpm (L/m)	380 / N/A	(1438 / N/A)
Coolant Capacity - Engine	US gal (L)	37.0	(140.1)
Minimum Pressure Cap Rating at Sea Level	psi (kPa)	14	(97)
Max Static Head of Coolant Above Crankshaft Centerline	ft (m)	60	(18.3)
Max Coolant (Top Tank) Temperature for Standby/Prime Power	°F (°C)	230 / N/A	(110 / N/A)
Thermostat (Modulating) Range	°F (°C)	181 - 203	(83 - 95)
Max Intake Manifold Temp Warning/Shutdown	°F (°C)	190 / 208	(87.7 / 98)

Low Temperature Circuit (LTC) Requirements

Max Coolant Friction Head External to Engine (1500/1800 rpm)	psi (kPa)	N/A / N/A	(N/A / N/A)
Aftercooler Water Flow at Stated Friction Head External to Engine:			
2.5 psi Friction Head (1500/1800 rpm)	US gpm (L/m)	N/A / N/A	(N/A / N/A)
Maximum Friction Head (1500/1800 rpm)	US gpm (L/m)	N/A / N/A	(N/A / N/A)
Max Coolant Temp into LTC @ 77°F (25°C) Ambient	°F (°C)	N/A	(N/A)
Max Coolant Temperature into LTC @			
Limiting Ambient Conditions for Standby/Prime Power	°F (°C)	N/A / N/A	(N/A / N/A)
Thermostat (Modulating) Range	°F (°C)	N/A - N/A	(N/A - N/A)
Coolant Capacity - Aftercooler	US gal (L)	N/A	(N/A)

Charge Air Cooler Requirements

Max Allowable Pressure Drop Across Charge Air Cooler and OEM	in Hg (kPa)	3.0 / N/A	(10.09 / N/A)
Max Charge Air Cooler Outlet to Ambient at 77°F (25°C)(CAC dT)	Δ°F (Δ°C)	52	(29)

Lubrication System

Oil Pressure at Minimum Idle Speed	psi (kPa)	20	(138)
Oil Pressure at Governed Speed	psi (kPa)	50 - 70	(345 - 483)
Max Oil Temperature	°F (°C)	248	(120)
Oil Capacity with OP6104: Low - High	US gal (L)	23.0 - 38.0	(87 - 144)
Total System Capacity (With Combo Filter)	US gal (L)	30.9	(117)

Fuel System

Max Fuel Supply Restriction at Fuel Pump Inlet (clean/dirty filter)	in Hg (kPa)	7.1 / 11.2	(24 / 38)
Max Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)	in Hg (kPa)	10	(35)
Max Fuel Inlet Temperature	°F (°C)	158	(70)
Max Supply Fuel Flow (1500/1800 rpm)	US gph (L/hr)	197 / N/A	(747 / N/A)
Max Return Fuel Flow (1500/1800 rpm)	US gph (L/hr)	105 / N/A	(399 / N/A)

Electrical System

System Voltage	volts	24	N/A
Minimum Recommended Battery Capacity Cold Soak @ 0 °F (-18 °C)	CCA	1800	N/A
Max Starting Circuit Resistance	ohm	0.002	N/A
Max Current Draw of the System	Amps	N/A	N/A

Cold Start Capability

Unaided Cold Start			
Minimum Cranking Speed	rpm	110	
Minimum Ambient Temp for Unaided Cold Start	°F (°C)	10	(-12)

Performance Data

		STANDBY		PRIME		CONTINUOUS	
		60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz
Governed Engine Speed	rpm		1500		1500		
Engine Idle Speed	rpm		700-1200		700-1200		
Gross Engine Power Output	bhp (kWm)		2057 (1489)		1805 (1346)		
Brake Mean Effective Pressure	psi (kPa)		914 (6303)		814 (5612)		
Friction Power	hp (kWm)		116 (87)		116 (87)		
Intake Air Flow	ft ³ /min (L/sec)		3711 (1751)		3508 (1656)		
Exhaust Gas Temp	°F (°C)		846 (452)		845 (452)		
Exhaust Gas Flow	ft ³ /min (L/sec)		8413 (3971)		8032 (3791)		
Air:Fuel Ratio			23.5:1		24.2:1		
Radiated Heat to Ambient	BTU/min (kWm)		7948 (140)		7417 (130)		
Heat to JW Radiator	BTU/min (kWm)		28398 (499)		26617 (468)		
Heat to Exhaust	BTU/min (kWm)		59340 (1043)		59012 (1038)		
* Heat to Fuel	BTU/min (kWm)		0 (0)		0 (0)		
Heat to Aftercooler Radiator	BTU/min (kWm)		18297 (322)		16961 (298)		
Charge Air Flow	lb/min (kg/min)		255 (116)		246 (111)		
Turbo Comp Outlet Pressure	psi (kPa)		46 (314)		43 (297)		
Turbo Comp Outlet Temp	°F (°C)		430 (221)		416 (213)		

* This is the maximum heat rejection to fuel.

Noise Emissions

Frequency (Hz) Sound Power dB(A) ¹²³		63	125	250	500	1000	2000	4000	8000	Overall
1500 rpm 50 Hz	Engine ⁴	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Exhaust ⁵	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1800 rpm 60 Hz	Engine ⁴	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Exhaust ⁵	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

1. The test figures quoted are from a single gen-set test and do not constitute a guarantee of performance for any particular engine. The data is subject to instrumentation, measurement, and engine to engine variability.

2. Test reference procedures ISO 3744 and ANSI S12.34-1998 as applicable.

3. All data are "A" weighted and are rounded to the nearest dB.

4. Engine with "typical Radiator and fan", Sound Power (dB).

5. Engine Exhaust at 1 Meter from open stack, Sound Pressure (dB).