


MODEL: BF75-60

440V | 1800rpm | 60Hz

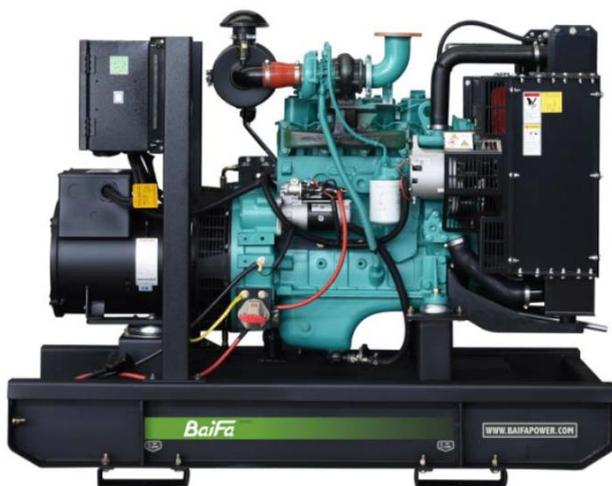

ESP Standby Power	88 kVA	PRP Prime Power	80 kVA
ENGINE	FAW	ALTERNATOR	BAIFA
	CA4110/125Z-11D		BF2CL

GENERAL FEATURES

Engine: FAW CA4110/125Z-11D

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF75-60

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	105.8	70/88	64/80
460/266	60	3	0.8	110.4	70/88	64/80
440/254	60	3	0.8	115.5	70/88	64/80
416/240	60	3	0.8	122.1	70/88	64/80

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF75-60**440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	BaiFa CA4110/125Z-11D
----------------------	-----------------------

Air intake system	Turbocharged
-------------------	--------------

Fuel system	Direct injection
-------------	------------------

Cylinder arrangement	4 in line
----------------------	-----------

Displacement	4.75L
--------------	-------

Bore and stroke	110×125 (mm)
-----------------	--------------

Compression ratio	17
-------------------	----

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	88KW
-----------------------------------	------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	17 m ³ /min
------------------	------------------------

Exhaust temperature	450°C
---------------------	-------

Air Intake System

Combustion air flow	6 m ³ /min
---------------------	-----------------------

Fuel System

Fuel consumption @ 100% (Prime Power) Load	215 g/kWh	19.7 L/h
--	-----------	----------

MODEL: BF75-60

440V | 1800rpm | 60Hz

Oil System

Total Oil Capacity: 16L

Cooling System

Max Water Temperature: 97±2°C

ALTERNATOR SPECIFICATION

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	87.5kVA
Alternator Efficiency	90.3%

MODEL: BF75-60**440V | 1800rpm | 60Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

Base fuel tank


MODEL: BF75-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

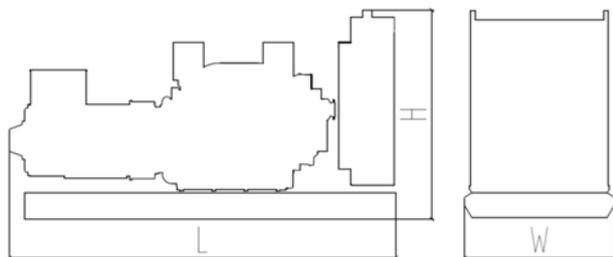

Standard Configuration (open type)

Overall Dimensions: 2100×860×1400 mm

Weight: 1100 kg

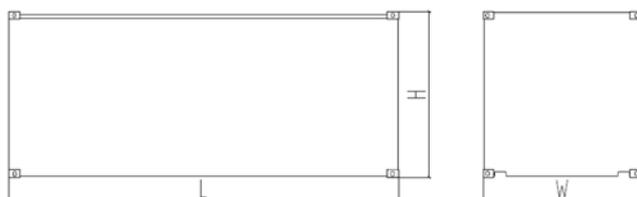

Soundproof Type

Overall Dimensions: 2810×1140×1830 mm

Weight: 1700 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633