


MODEL: BF-V550

400V | 1500rpm | 50Hz

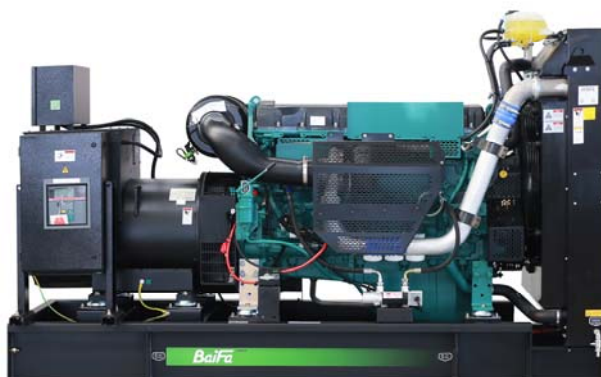

ESP Standby Power	550 kVA	PRP Prime Power	500 kVA
ENGINE	VOLVO	ALTERNATOR	STAMFORD
	TAD1346GE		S5L1D-C4

GENERAL FEATURES

Engine: VOLVO TAD1346GE

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-V550****400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF ($\cos\Phi$)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	722	440/550	400/500
415/240	50	3	0.8	765	440/550	400/500
400/230	50	3	0.8	794	440/550	400/500
380/220	50	3	0.8	836	440/550	400/500

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-V550****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TAD1346GE
----------------------	-----------------

Air intake system	Turbocharged, Air/Air inter cooling
-------------------	-------------------------------------

Fuel system	Elec. Injection, Elec. Fuel System
-------------	------------------------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	12.78L
--------------	--------

Bore and stroke	131×158 (mm)
-----------------	--------------

Compression ratio	17.8
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	470KW (with fan)
-----------------------------------	------------------

Governor type	EMS2
---------------	------

Exhaust System

Exhaust gas flow	79.3 m ³ / min
------------------	---------------------------

Exhaust temperature	449°C
---------------------	-------

Max back pressure	10 kPa
-------------------	--------

Air Intake System

Max intake restriction	5 kPa
------------------------	-------

Combustion air flow	32.4 m ³ /min
---------------------	--------------------------

Air flow required for radiator	336 m ³ /min
--------------------------------	-------------------------

**MODEL: BF-V550****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	191 g/kWh	98.5L/h
Fuel consumption @ 75% (Prime Power) Load	198 g/kWh	76.5L/h
Fuel consumption @ 50% (Prime Power) Load	199 g/kWh	52L/h

Oil System

Total oil capacity	36L
Oil consumption	0.04L/h
Oil sump capacity	19~30L

Cooling System

Coolant capacity	48 L
Max water temperature	107°C

**MODEL: BF-V550****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	500kVA
Alternator Efficiency	93.8%

**MODEL: BF-V550****400V | 1500rpm | 50Hz**

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free & watering-free) with connective wires

Special coolant

MCCB

MODEL: BF-V550

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system


Spare parts

Trailer type

Switch box

Automatic transfer switch


DIMENSIONS & WEIGHT

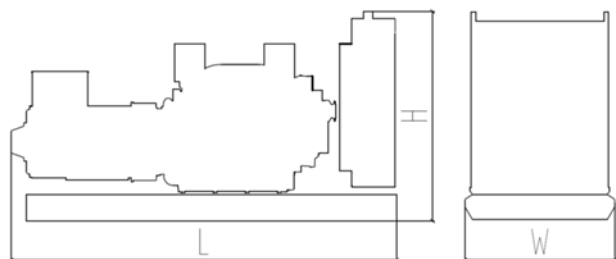

Standard Configuration (open type)

Overall Dimensions: 3200×1200×1950 mm

Weight: 3250 kg

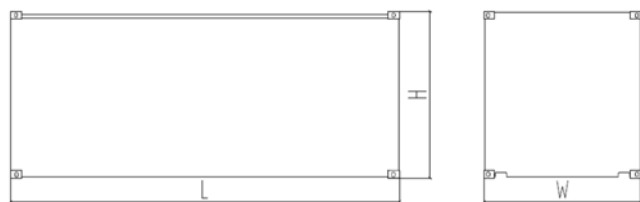

Soundproof Type

Overall Dimensions: 4230×1460×2150 mm

Weight: 4550 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION