



# CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE PERFORMANCE CURVE

CONFIGURATION  
D233031DX02

ENGINE MODEL: KTA38-G7E

CURVE NUMBER: FR

CPL No.: TBD

DATE: 2021/7/13


Displacement: 38L (2300 in<sup>3</sup>)      Aspiration: Turbocharged , Aftercooled      RATING  
 BoreXStroke: 159X159mm (6.25X6.25 in.)      Fuel System: Cummins PT      Stand by: 990 kW(1328 BHP)@1500 r/min  
 Compress Ratio: 14.7:1      No. of Cylinder: V-12      Prime: 935 kW(1254 BHP)@1500 r/min

All data is based on the engine operating with fuel system, water pump, and 20 in. H<sub>2</sub>O(4.98kPa) inlet air restriction with 5.8 in.(147mm) inner diameter, and with 2 in. Hg(7kPa) exhaust restriction with 8 in.(203mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolant as 50% ethylene glycol/50% water. All data is subject to change without notice.

## GROSS ENGINE POWER OUTPUT

SPEED rpm	STANDBY POWER		PRIME POWER		CONTINUOUS POWER	
	BHP	kW	BHP	kW	BHP	kW
1500	1328	990	1254	935	1106	825

## FUEL CONSUMPTION

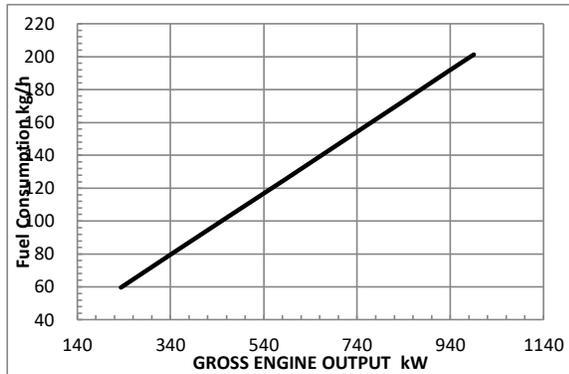

	OUTPUT POWER		CONSUMPTION		BFSC		
	%	BHP	kW	Lb/h	kg/h	g/kW.h	Lb/BHP.h
<b>1500RPM</b>							
<b>STANDBY</b>							
100	1328	990	444	201	203	0.334	
<b>PRIME</b>							
100	1254	935	421	191	204	0.336	
75	940	701	324	147	210	0.345	
50	627	468	228	103	221	0.363	
25	313	234	132	60	256	0.420	
<b>CONTINUOUS</b>							
100	1106	825	375	170	206	0.339	

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in. Hg(100kPa) barometric pressure [300ft.(91m) altitude] 77deg F (25 deg C) inlet temperature, and 0.30 in. Hg(1kPa) water vapor pressure with No.2 diesel fuel.

TECHNICAL DATA DEPT.

CERTIFIED WITHIN 5%

CHIEF ENGINEER

Cummins Confidential



# POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

**STANDBY POWER RATING** is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

**CONTINUOUS POWER RATING**

Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

**PRIME POWER RATING** is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

**UNLIMITED TIME RUNNING PRIME POWER**

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

**LIMITED TIME RUNNING PRIME POWER**

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at Prime Power rating should use the Continuous Power rating.

**Reference Standards:**

BS-5514 and DIN-6271 standards are based on ISO-3046.

**Operation At Elevated Temperature And Altitude:**

The engine may be operated at:

1800RPM up to 5,000 ft.(1,500m) and 104°F (40°C) without power deration.

1500RPM up to 5,000 ft.1,500m) and 104°F (40°C) without power deration.

For sustained operation above these conditions, derate by 4% per 1,000ft. (300m), and 1% per 10°F (2% per 11°C).



# CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

**ENGINE MODEL(S): KTA38-G7E**

**STAND\_BY: 990 kW(1328 BHP)@1500 r/min**

**PRIME: 935 kW(1254 BHP)@1500 r/min**

**CONFIGURATION ..... D233031DX02**

**REFERENCE INFORMATION:**

**CPL NUMBER ..... TBD**

**DATASHEET ..... FR**

**DATE ..... 2021/7/13**

**GENERAL ENGINE DATA**

Type.....	4 Cycle , 60° Vee , 12 Cylinder
Aspiration.....	Turbocharged , Aftercooled
Bore—in.(mm)×stroke—in.(mm).....	6.25×6.25 (159×159)
Displacement—in <sup>3</sup> (L).....	2300 (38)
Compression Ratio.....	14.7:1
Dry Weight	
Fan Hub to Flywheel Engine —lb(kg).....	8555 (3880)
Wet Weight	
Fan Hub to Flywheel Engine —lb(kg).....	9065 (4112)
Moment of Inertia of Rotating Components (Excluding Flywheel) —lb <sub>m</sub> .ft <sup>2</sup> (kg•m <sup>2</sup> ).....	94 (3.96)
·With FW 6001 Flywheel —lb <sub>m</sub> .ft <sup>2</sup> (kg•m <sup>2</sup> ).....	248.0 (10.45)
·With FW 6011 Flywheel —lb <sub>m</sub> .ft <sup>2</sup> (kg•m <sup>2</sup> ).....	493.0 (20.78)
C.G. Distance From Rear Face of Flywheel Housing (FH6024)—in(mm).....	38.6 (980)
C.G. Distance Above Crank Centerline—in(mm).....	11 (279)
Maximum Allowable Bending Moment at Rear Face of Block —N•m(lb.ft).....	2000 (907)
Firing Order.....	1R-6L-5R-2L-3R-4L-6R-1L-2R-5L-4R-3L

**ENGINE MOUNTING**

Maximum Bending Moment at Rear Face of Block —lb.ft(N•m)..... 3000 (4067)

**EXHAUST SYSTEM**

Maximum Allowable Back Pressure —in.Hg(kPa)..... 3 (10)

**AIR INDUCTION SYSTEM**

Maximum Allowable Intake Air Restriction With Heavy Duty Air Cleaner

    Dirty Element —in.H<sub>2</sub>O(kPa)..... 25 (6.23)

    Clean Element —in.H<sub>2</sub>O(kPa)..... 15 (3.73)

**COOLING SYSTEM**

Coolant Capacity

    Engine Only —U.S.Gal(L)..... 31.2 (118.1)

Minimum Allowable Pressure Cap @ sea level— PSI(kPa)..... 10 (69)

Maximum Pressure Drop Across Any External Cooling System Circuit —PSI(kPa)..... 5.0 (34.5)

Maximum Allowable Top Tank Temperature (Stand\_by/Prime) —°F(°C)..... 220/212 (104/100)

Standard Thermostat (modulating) Range— °F(°C)..... 180-200 (82-93)

Maximum Coolant Pressure (Exclusive of Pressure Cap) —PSI(kPa)..... 15 (103)

Minimum Allowable Fill Rate —U.S.GPM(L/min)..... 5 (18.9)

Minimum Allowable Coolant Expansion Space —% of System Capacity..... 5

Maximum Allowable Deaeration Time —min..... 25



# CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

## LUBRICATION SYSTEM

Oil Pressure		
@ Idle —PSI(kPa).....	20	(138)
@ Rated Speed —PSI(kPa).....	45-65	(310-448)
Oil Flow at Rated Speed —U.S.GPM(L/min).....	124	(469)
Maximum Allowable Oil Temperature —°F(°C).....	250	(121)
By-Pass Filter Capacity		
Spin-on Cartridge Type —U.S.Gal(L).....	2 X 0.7	(2 X 2.6)
Oil Pan Capacity (Option OP6024)		
High —U.S.Gal(L).....	30.0	(114.0)
Low —U.S.Gal(L).....	23.0	(87.4)
Total System Capacity (Excluding By-Pass Filter) —U.S.Gal(L).....	35.7	(135.1)
Angularity of Standard Oil Pan ( Option OP6024)		
Front Down.....	30°	
Front Up.....	30°	

## FUEL SYSTEM

Fuel Injection System.....	Cummins PT	
Maximum allowable Restriction to PT Fuel Pump		
With Clean Fuel Filter —in.Hg(kPa).....	4	(13.55)
With Dirty Fuel Filter —in.Hg(kPa).....	8	(27.09)
Maximum Allowable Injector Return Line Restriction		
With Check Valves —in.Hg(kPa).....	6.5	(22.0)
Less Check Valves —in.Hg(kPa).....	2.5	(8.5)
Minimum Allowable Fuel Tank Vent Capability —ft <sup>3</sup> /h (L/h) .....	15	(425)
(With 2.5 in. Hg (63 mm Hg) or Less Back Pressure)		
Starter (Heavy, Anode)—Volt.....	24	
Battery Recharge System,Negative ground—A.....	35	
Maximum Allowable Resistance of Starting Circuit—Ω.....	0.002	
Minimum Recommended Battery Capacity		
·Cold Soak at 50°F(10°C) or Above—0°F CCA.....	1200	
·Cold Soak at 32~50°F(0~10°C) or Above—0°F CCA.....	1280	
·Cold Soak at 0~32°F(-18~0°C) or Above—0°F CCA.....	1800	

## PERFORMANCE DATA

All data is based on the engine operating with fuel system, water pump, lubricating oil pump, air cleaner, and muffler, not included are alternator, compressor, fan, optional equipment and driven components. Data represents gross engine performance capabilities obtained and corrected in accordance with SAE J1349 conditions for 29.61 in Hg(100 kPa) barometric pressure[300ft. (90 m) altitude], 77°F (25°C) inlet air temperature, and 0.30 in. Hg (1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2. All data is subject to change without notice.



# CHONGQING CUMMINS ENGINE COMPANY LTD. ENGINE DATA SHEET

	STAND_BY		PRIME	
	60 Hz	50 Hz	60 Hz	50 Hz
Engine Speed r/min.....		1500		1500
Idle Speed r/min.....		700 ~ 800		700 ~ 800
Gross Power Output BHP(kW).....		1328 (990)		1254 (935)
Brake Mean Effective Pressure PSI(kPa).....		302 (2084)		285 (1968)
Piston Speed ft/min(m/s).....		1565 (8.0)		1565 (8.0)
Friction Horsepower BHP(kW).....	N/A	115 (86)	N/A	115 (86)
Intake Air Flow lb/min(kg/h).....		196 (5346)		191 (5200)
Exhaust Gas Flow lb/min(kg/h).....		204 (5548)		198 (5391)
Exhaust Gas Temperature °F(°C).....		911 (488)		894 (479)
Heat Rejection to Ambient BTU/min(kW).....		2848 (50)		2748 (48)
Heat Rejection to Jacket Coolant BTU/min(kW).....		22306 (392)		21596 (380)
Heat Rejection to LTA BTU/min(kW).....		11430 (201)		10634 (187)

Engine Model: KTA38-G7E  
Data Sheet: FR  
Date: 2021/7/13

CHONGQING CUMMINS ENGINE CO., LTD.

CHONGQING, CHINA, 400031